

DISTRICT EXPLORATION ADVANCES AT EL ZORRO

NEW TARGETS EMERGING ACROSS A 40KM GOLD CORRIDOR

Tesoro Gold Limited (Tesoro or the Company) (ASX: **TSO**, OTCQB: **TSORF**, FSE: **5D7**) is pleased to provide an update on regional exploration activities at the **El Zorro Gold Project** in Chile (**El Zorro**, or the **Project**).

Multiple exploration campaigns, including geophysical surveys and soil sampling, have been conducted concurrently with the ongoing Ternera infill and extensional drilling programmes to define multiple high-priority drill targets across the broader El Zorro concession holding.

HIGHLIGHTS

- **Completion of a high-resolution helicopter magnetic and radiometric survey** across the entire El Zorro concession area;
- **Data collected outlines a >40km long, north south structural corridor**, associated with gold anomalism, further **extending the existing El Zorro Gold Corridor by 10km**;
- Multiple **new intrusive bodies and structural features identified**;
- Newly interpreted **El Zorro tonalite dyke systems highlight additional exploration potential**;
- Provides **enhanced geophysical imaging of the existing targets** across the broader El Zorro Gold Corridor;
- Complementary **systematic grid soil sampling completed at La Brea, Drone Hill and Pena Blanca targets**; and
- Soil geochemistry confirms **strong gold anomalism validating the potential of multiple drill targets**.

Tesoro Managing Director, Zeff Reeves, commented:

"El Zorro represents a rare opportunity to explore and make additional discoveries within the first Intrusive Related Gold System (IRGS) discovered in Chile and ultimately develop a district-scale gold camp. While we continue to advance and de-risk the Ternera Gold Deposit, our regional exploration programmes are rapidly expanding the pipeline of high-priority targets across the broader district."

"The recently completed high resolution helicopter magnetic survey has generated excellent new datasets and has already highlighted several additional prospective intrusive centres and structural trends across the district. In parallel, systematic soil sampling at La Brea, Done Hill and Pena Blanca has further added to our initial excitement for what may be below the surface."

"We remain on schedule to complete the current Ternera infill drilling programme within the next six to eight weeks, after which we expect to accelerate district-scale drilling across a number of these newly defined targets."

SURVEY DETAIL

During late December 2025, New-Sense Geophysics Limited (**New-Sense**) were engaged to carry out a high-sensitivity, helicopter-borne magnetic and gamma-ray spectrometric geophysical survey over the entirety of the El Zorro Gold Project area, covering approximately 610km² (see Figure 1).

The survey was flown in two sectors, comprising a broad area with 200m spaced flight lines and an infill survey area flown with 100m spaced flight lines (see Figure 1). A total of 4,880.50 line-kilometres were flown by helicopter to collect magnetic and radiometric data utilising a QuSpin Total-Field Magnetometer and a 1024-channel spectrometer with four downward-looking crystals (total 16 litres) and one upward-looking crystal (total 4 litres).

Full details of the survey parameters are presented within the JORC tables in Appendix 1.

Tesoro's geophysical consultants, Resource Potentials Pty Ltd, carried out final data processing and imaging to produce a suite of magnetic and radiometric images that are being used for ongoing interpretation and gold targeting, in conjunction with geological and geochemical datasets.

Preliminary interpretation of the helicopter magnetic and radiometric survey data has identified several structural trends that may be associated with gold mineralisation along the El Zorro Corridor, as well as multiple intrusive occurrences that remain unexplored (see Figure 1).

Further processing, modelling and interpretation of the survey data is ongoing to assist target generation across the broader project area.

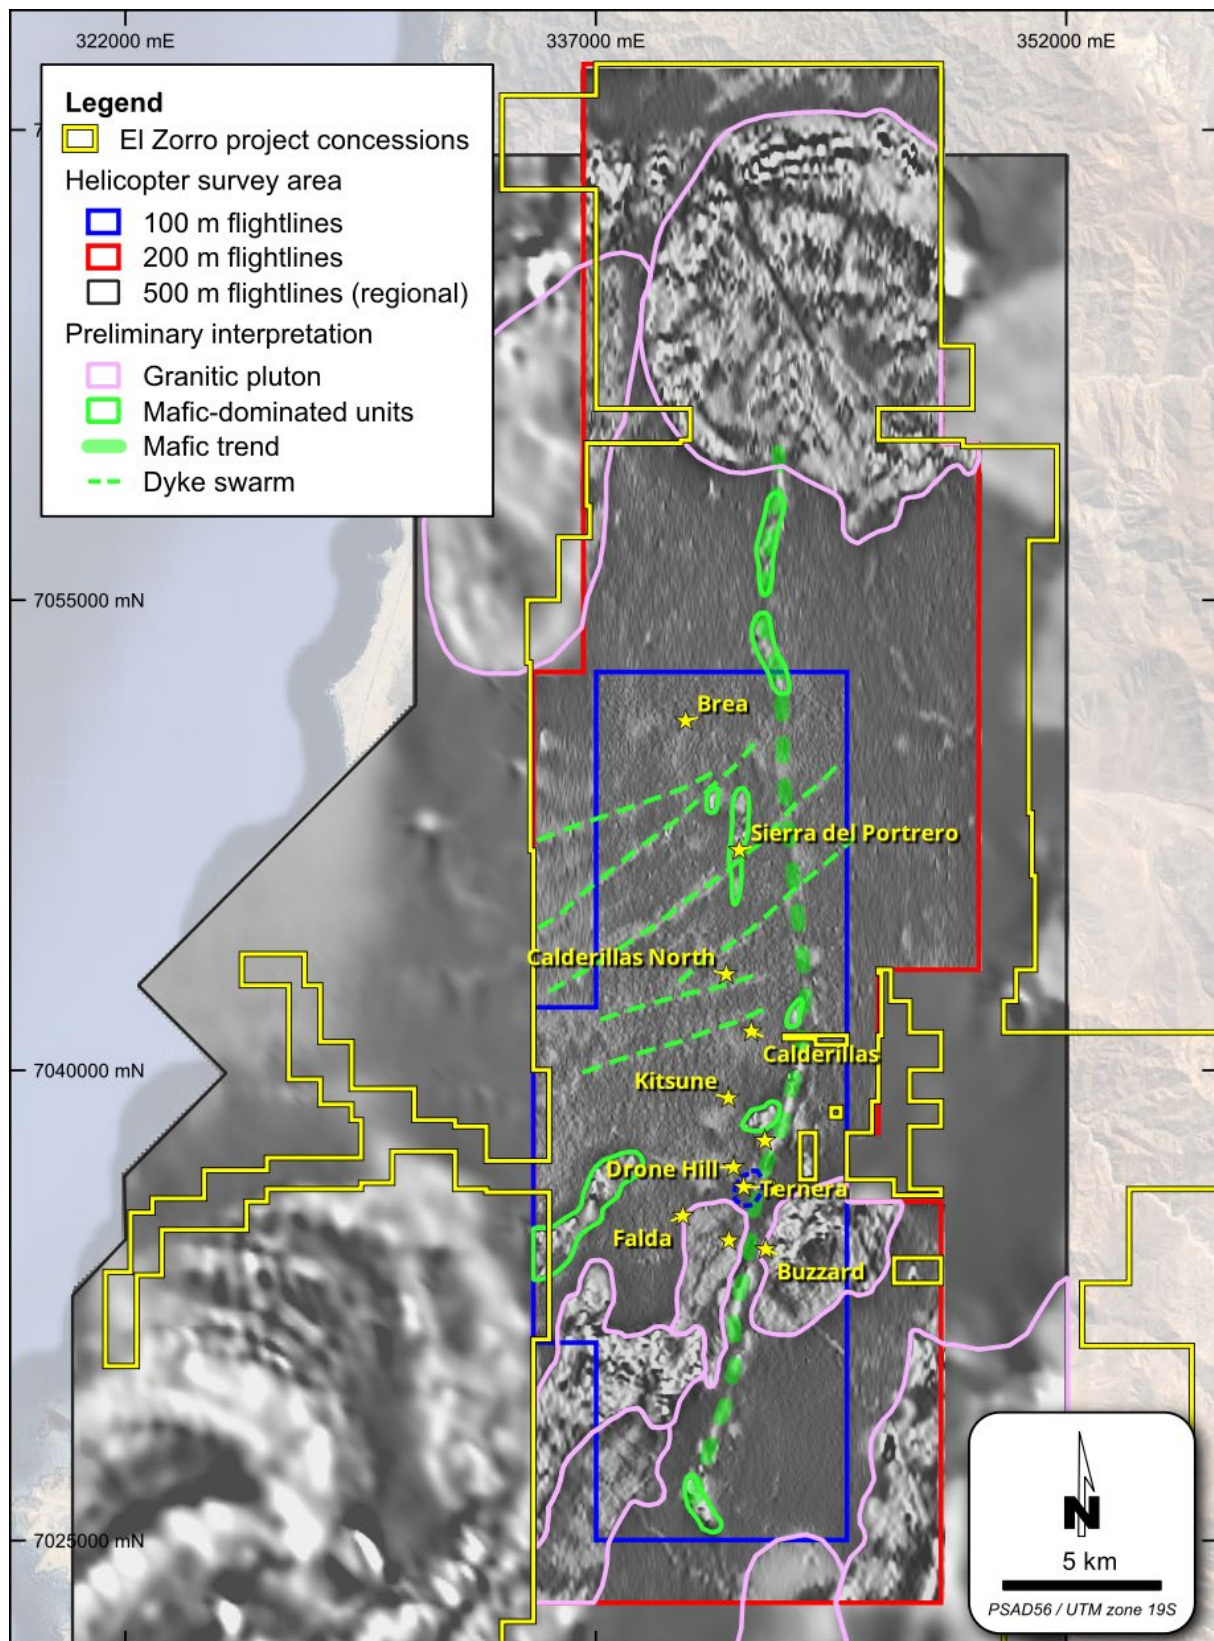


Figure 1: El Zorro Gold Project – High-resolution geophysical survey preliminary interpretation: Magnetic susceptibility map (TMIRTP-1VDAGC). The 200m spaced flight line area is outlined in red, 100m spaced flight line area outlined in blue. The underlying image is 500m spaced regional data. Datum PSAD56 19S.

SOIL SAMPLING

In addition, three orientation programmes of systematic gridded soil sampling have been completed over the La Brea, Drone Hill and Pena Blanca Targets to assess this technique for defining new gold targets. These areas were selected due to the already confirmed location of surface gold mineralisation.

A total of 331 samples were collected on a nominal 50m x 50m grid across areas previously identified from first-pass rock chip and channel sampling as being prospective for gold mineralisation.

Samples were analysed for low level gold and 47 multi-element indicators to assist with drill targeting and identify the most gold fertile zones for follow up exploration work, including drilling.

Sample details and results are presented in Appendix 2.

All three targets exhibit low level gold anomalism coincident with arsenic and bismuth anomalism within the soils, a relationship commonly observed in IRGS.

In addition, geochemical data has defined potassic alteration systems across each target, similar to alteration characteristics exhibited at the Ternera Gold Deposit and often associated with gold mineralisation throughout the district.

Results have successfully defined geochemical anomalies at all three targets (Figures 2, 3 and 4), further enhancing their gold prospectivity. Soil geochemistry also aligns well with mapped mineralised fault zones and favourable host lithologies. The orientation soil sampling programmes validate the method to effectively identify new gold targets and alteration systems, associated with gold mineralisation at the El Zorro Gold Project.

Additional soil sampling programmes are planned at multiple targets to identify new and expand existing drill targets.

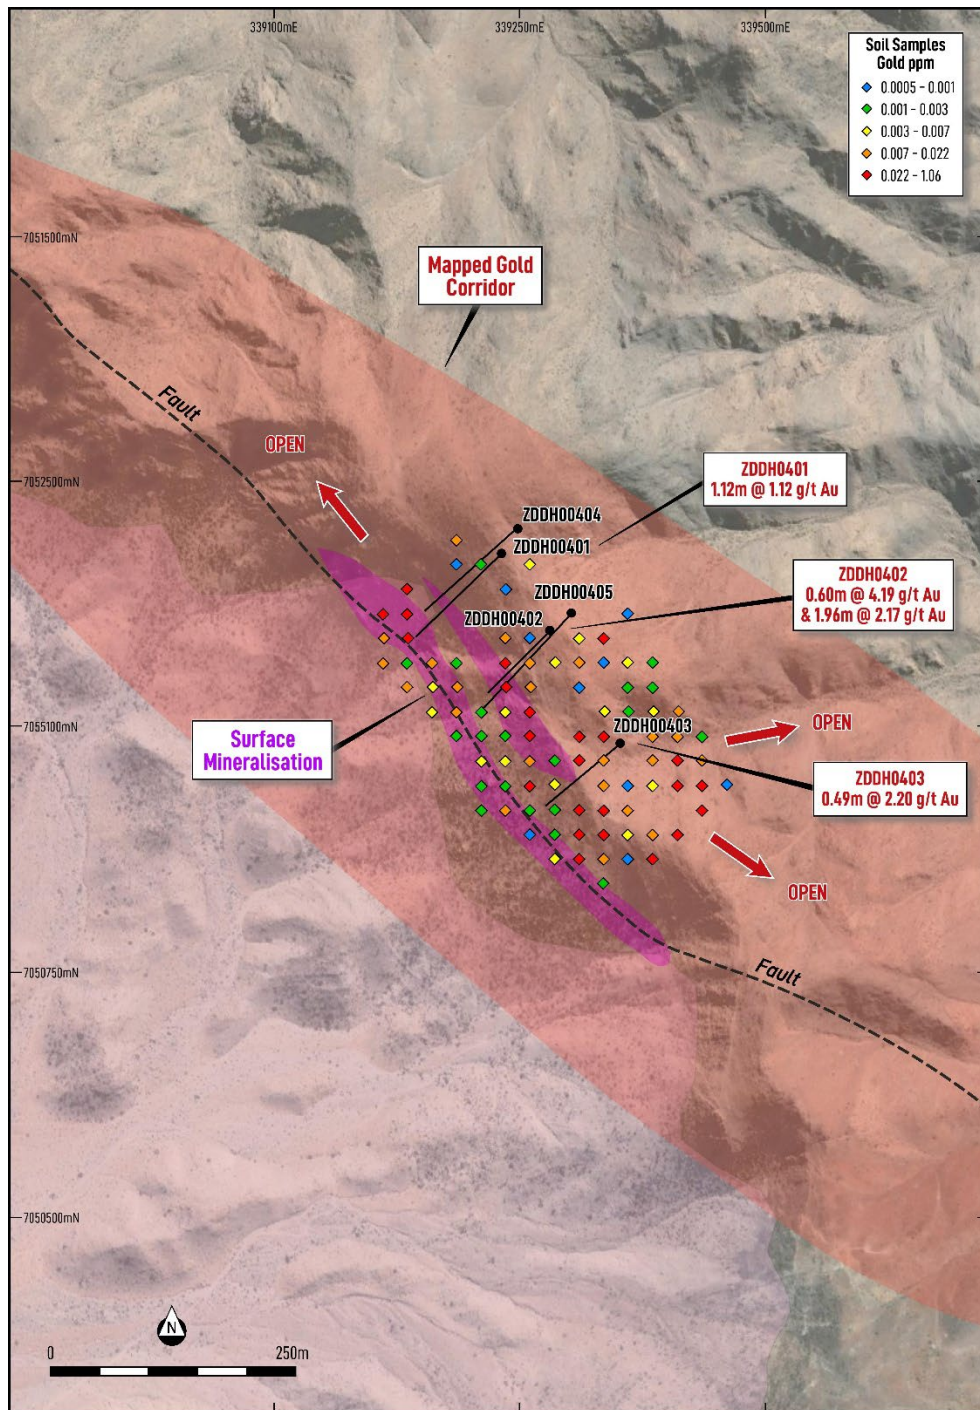


Figure 2: El Zorro Gold Project – La Brea Target Soil Geochemistry Map. Initial soil sampling results identify potential to expand the La Brea drill target to the northwest and south east. Refer ASX Announcement 11 December 2025 for La Brea drill results. Datum PSAD56 19S.

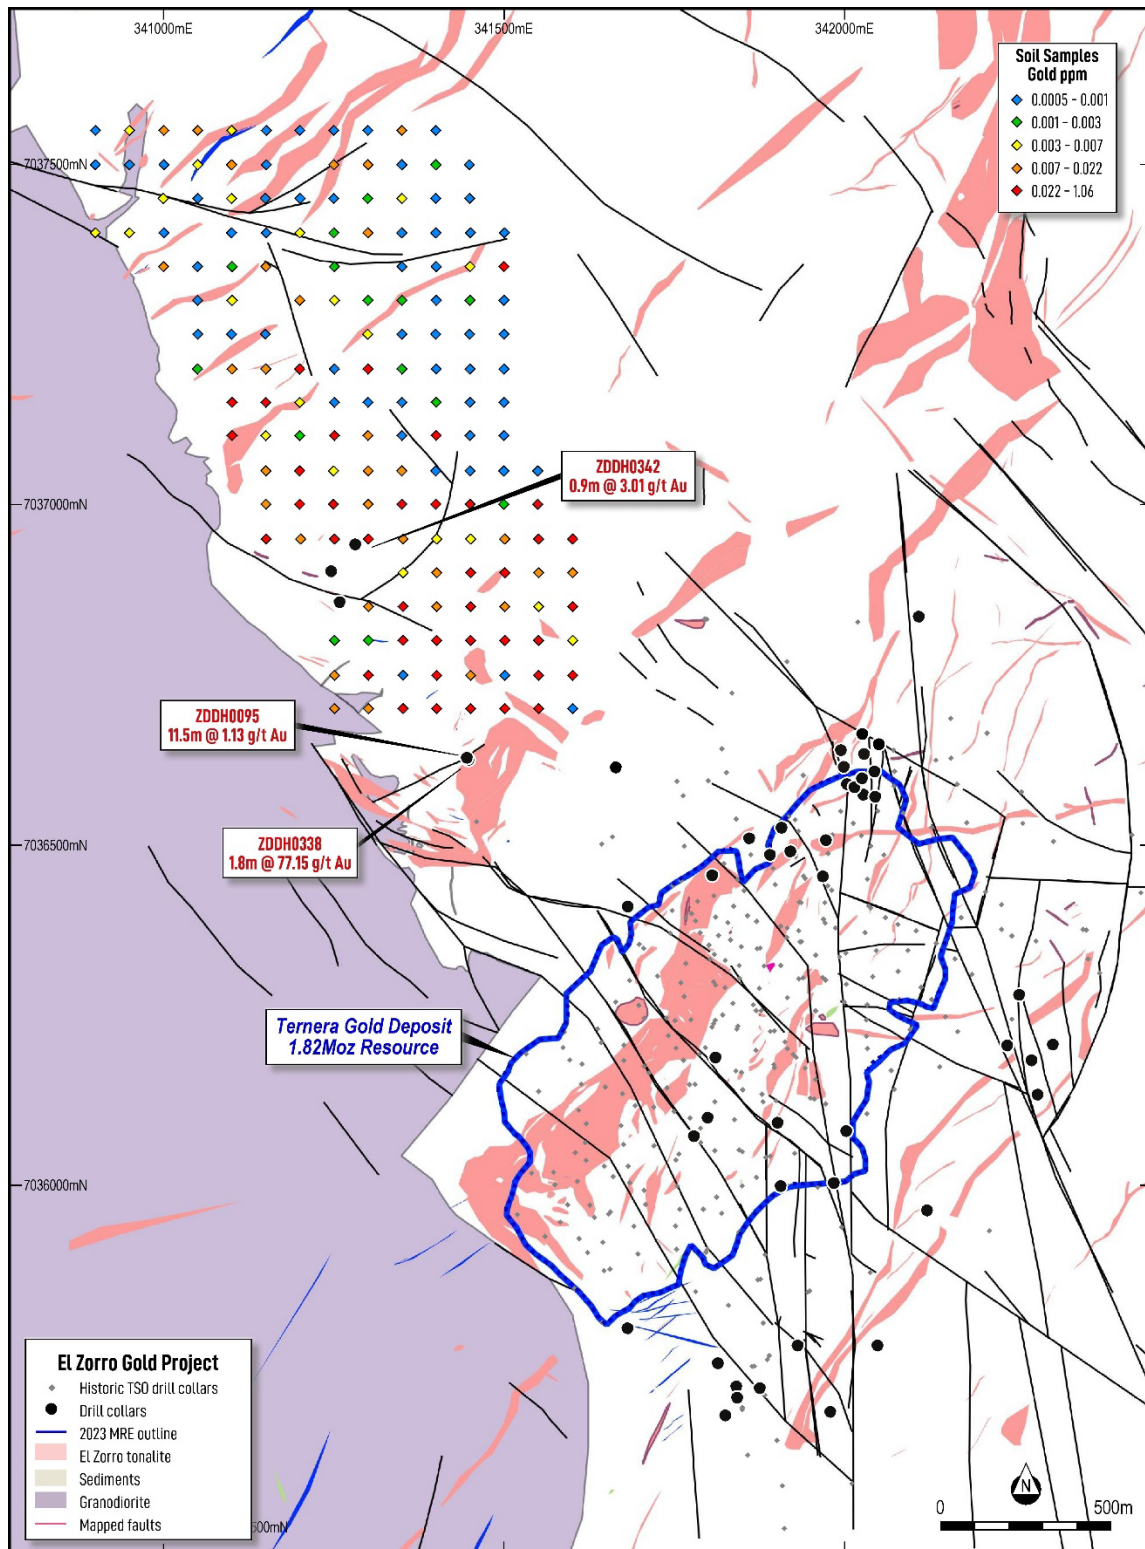


Figure 3: El Zorro Gold Project – Drone Hill Target Soil Geochemistry Map. Initial soil sampling results identify additional potential at Drone Hill, gold in soil anomaly is coincident with previous high-grade drill results. Selected results shown, refer to ASX Announcements 23 March 2021, 13 June 2024 and 28 October 2024. Datum PSAD56 19S.

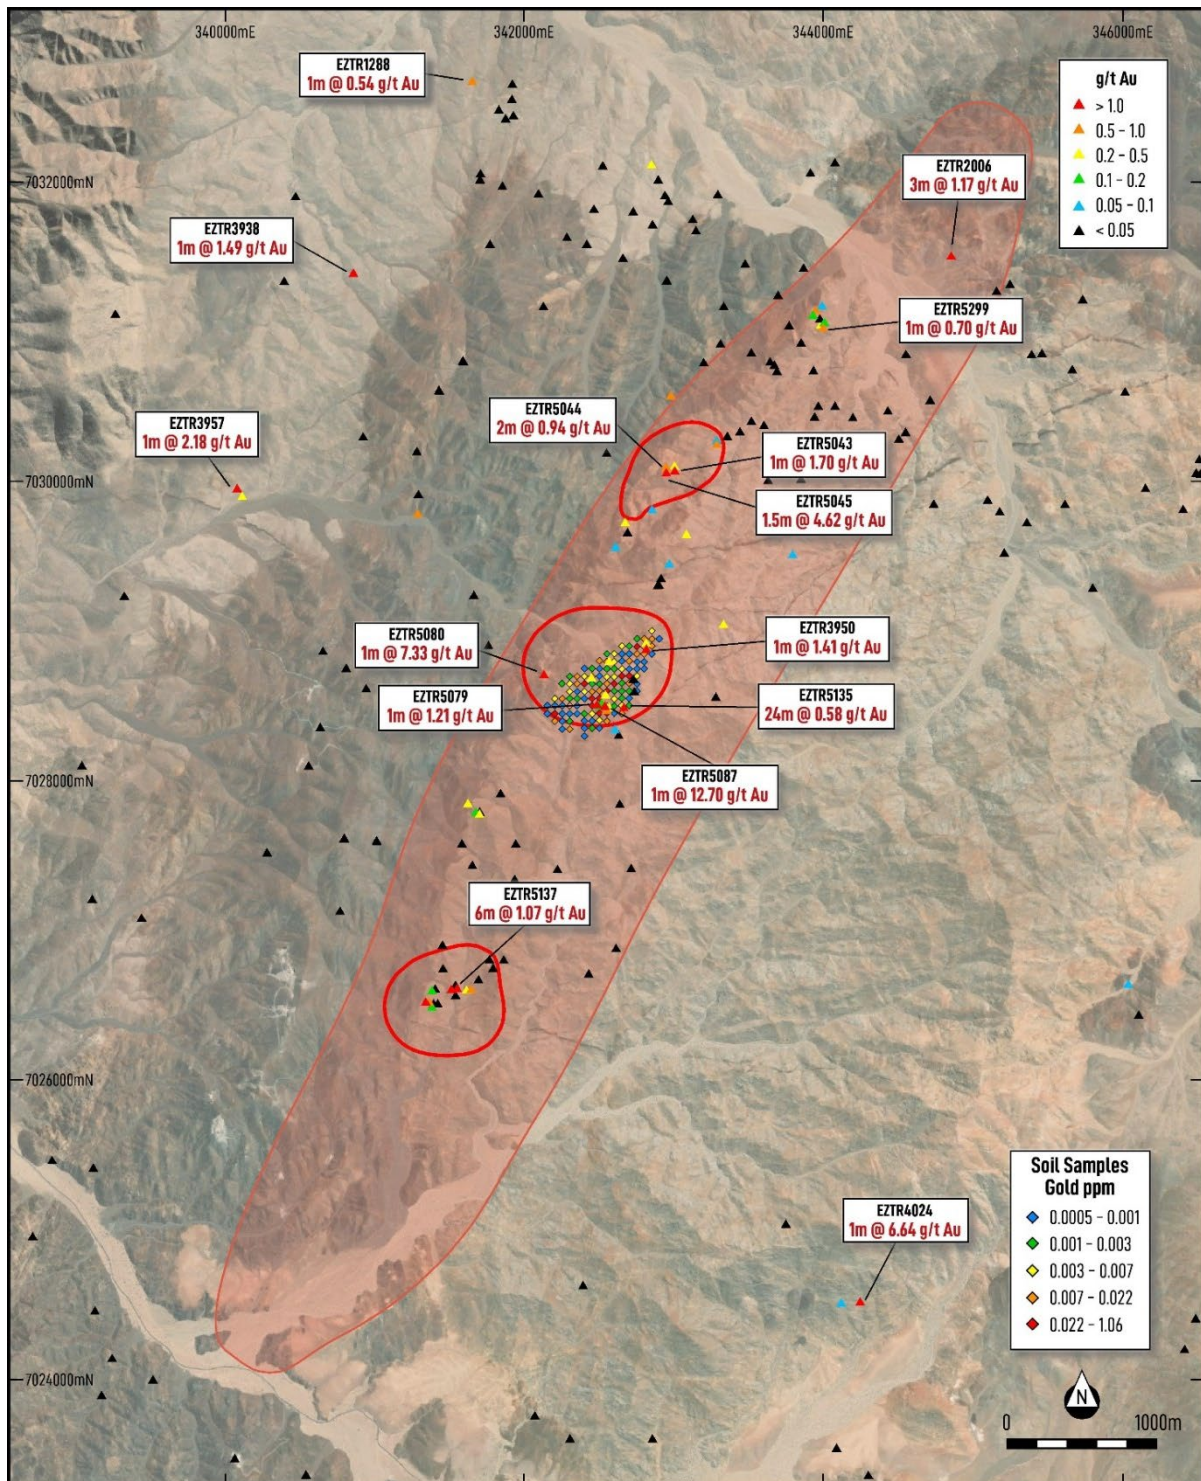


Figure 4: El Zorro Gold Project – Pena Blanca Target Soil Geochemistry Map. Initial soil sampling results from the central Pena Blanca Target highlight gold potential within a large alteration zone coincident with previous high grade gold channel sampling results (refer ASX Announcement 6 November 2025) . Additional soil sampling programmes are planned to further define the Pena Blanca Target. Datum PSAD56 19S.

Authorised by the Board of Tesoro Gold Ltd.

For more information:

Company:

Zeff Reeves, Managing Director
Tesoro Gold Limited
info@tesorogold.com.au


Table 2: Terner Mineral Estimates for selected cut-off grades. Highlighted open pit Mineral Resource has been constrained by an optimised pit shell using a gold price of US\$3000/oz and process recovery of 94.5%. The estimates in this table are rounded to reflect their precision; rounding errors are apparent.

Tenera Updated MRE Au g/t cut-off	Indicated			Inferred			Total		
	Mt	Au g/t	Koz	Mt	Au g/t	Koz	Mt	Au g/t	Koz
Optimised Open Pit at 0.30	31.8	1.10	1,123	19.5	1.11	692	51.2	1.1	1,816
2.00	3.5	3.55	394	2.5	3.54	280	5.9	3.54	673
1.00	10.5	2.08	705	7.9	2.04	520	18.5	2.06	1,225
0.70	17.5	1.58	891	13	1.57	657	30.5	1.58	1,547
0.30	31.8	1.10	1,128	26.1	1.03	863	58.1	1.07	1,992
0.20	33.8	1.05	1,144	28.7	0.96	885	62.5	1.01	2,028

Refer ASX announcement dated 4 August 2025

About Tesoro

Tesoro Gold Limited has discovered and defined the first Intrusive Related Gold System in Chile. The 1.82M oz Ternerá discovery is in the Coastal Cordillera region of Chile. The Coastal Cordillera region is host to multiple world-class copper and gold mines, has well established infrastructure, service providers and an experienced mining workforce. Large areas of the Coastal Cordillera remain unexplored due to the unconsolidated nature of mining concession ownership, but Tesoro, via its in-country network and experience has been able secure rights to the district-scale El Zorro gold project in-line with the Company's strategy. Tesoro's 95% owned Chilean subsidiary owns 95.4% of the El Zorro Gold Project (see ASX announcement released 12 August 2025).

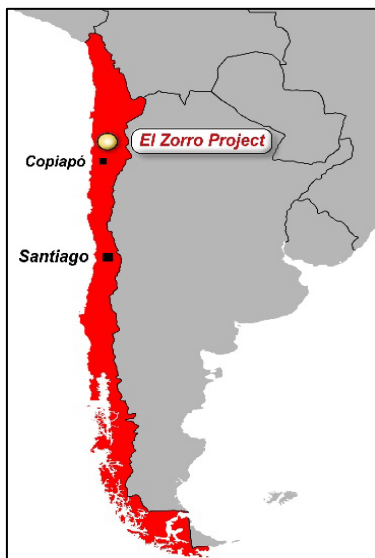

Future Performance

This announcement may contain certain forward-looking statements and opinions. Forward-looking statements, including projections, forecasts and estimates, are provided as a general guide only and should not be relied on as an indication or guarantee of future performance and involve known and unknown risks, uncertainties, assumptions, contingencies and other important factors, many of which are outside the control of the Company and which are subject to change without notice and could cause the actual results, performance or achievements of the Company to be materially different from the future results, performance or achievements expressed or implied by such statements. Past performance is not necessarily a guide to future performance, and no representation or warranty is made as to the likelihood of achievement or reasonableness of any forward-looking statements or other forecast. Nothing contained in this announcement, nor any information made available to you is, or and shall be relied upon as, a promise, representation, warranty or guarantee as to the past, present or the future performance of Tesoro Gold.

Competent Persons Statements

The information in this report that relates to Mineral Resources is based on information compiled by Mr Lynn Widenbar (B.Sc. (Hons) Geology, M.Sc. FAusIMM, MAIG), a Competent Person who is a Fellow of The Australasian Institute of Mining and Metallurgy. Mr Widenbar is acting as an independent consultant to Tesoro Gold Limited. Mr Widenbar has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. The Company confirms that it is not aware of any new information or data that materially affects the information contained the form and context in which the Competent Person's findings are presented have not been materially modified from in the original announcement on 4 August 2025, and all material assumptions and technical parameters underpinning the estimates in that announcement continue to apply and have not materially changed.

The information in this report that relates to Exploration Results is based on information compiled by Mr Zeffron Reeves (B App Sc (Hons) Applied Geology) MBA, MAIG). Mr Reeves is a member of the Australian Institute of Geoscientists and a Director and shareholder of the Company. Mr Reeves has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Reeves consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

The information in this report that relates to Geophysical Results is based on information compiled by Dr Alexander Costall. Dr Costall is a Member of the Australian Institute of Geoscientists (AIG) and the Australian Society of Exploration Geophysics (ASEG). Dr Costall is a consultant to Tesoro Gold Limited. Dr Costall has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources & Ore Reserves. The Company confirms that it is not aware of any new information or data that materially affects the historical geophysical results included in the original reports.

APPENDIX 1: JORC TABLES

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.	Tesoro completed soil sampling. Sampling processes are considered appropriate for the style of mineralisation and stage of work at each target.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Tesoro completed soil sampling, Sampling processes are considered appropriate for the style of mineralisation.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done, this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	Tesoro has completed a soil sampling program. Sampling was by industry standard technique including: - location of the station using handheld GPS. 2 kg of minus 75 micron Stream and ridge sediment samples were collected at pre determined locations. - Samples are packed in plastic bags with assay-number tickets stapled to the bag.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	No drilling reported in this report.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	No drilling reported in this report.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	No drilling reported in this report.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	No drilling reported in this report.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Qualitative logging and descriptions of each sample were made, recorded by Tesoro's geologists
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.	Logging of samples was qualitative.
	The total length and percentage of the relevant intersections logged.	All samples logged and recorded.

Criteria	JORC Code explanation	Commentary
Subsampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	No drilling reported in this report
	If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.	Tesoro has not completed any percussion drilling.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Samples were pulverised to 75% passing 200 mesh in prior to digestion for assay and analysis.
	Quality control procedures adopted for all subsampling stages to maximise representivity of samples.	Samples were logged by a qualified geoscientist. Each subsample is considered to be representative of the sample.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	There are field duplicate samples collected from the channels with irregular results.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Sample sizes collected were considered appropriate to reasonably represent the material being tested.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Assays reported in this report were undertaken at the accredited laboratory of ALS Santiago, which is fully certified. Sediment samples were assayed using a 25 g charge aqua regia digest and AAS finish for gold. Multielement assays were completed by 4-acid digest with a 2.5 g charge. All techniques are appropriate for the element being determined.
	For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Specifications of the geophysical methods reported are: Magnetic survey data measured using a QFTM total field magnetometer sampling at 250 Hz and down-sampled during post-processing to 10 Hz. Calibration of the magnetic field sensor was carried out during a specific calibration flight including a Figure of Merit to compensate for the proximity of the aircraft to the sensor. Post-processing includes diurnal, heading, lag, IGRF, tie-line levelling and reduction to pole corrections. Radiometric survey data measured using a RS-500 16L crystal pack sampling at 1 s intervals. Calibration of the RS-500 was completed by the manufacturer, with cosmic flight tests and height attention tests completed on-site.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	QAQC procedures included the insertion of Certified Reference Materials (CRMs) (5%) and blank material (2%), Check samples (5%) and check assaying (5%) Cube Consulting Pty Ltd manage the database for Tesoro. The laboratories used have generally demonstrated analytical accuracy at an acceptable level within 95% confidence limits.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	No significant intersections have been reported.
	The use of twinned holes.	No twinned holes have been completed.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Tesoro sampling is digitally entered and stored following documented handling protocols. The protocols are considered adequate.

Criteria	JORC Code explanation	Commentary
	Discuss any adjustment to assay data.	No adjustments were made to assay data
Location of data points	Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Sample locations have been located using a handheld GPS. Helicopter magnetic and radiometric data are GPS-located using a Novatel OEM628 GPS.
	Specification of the grid system used.	The grid system used PSAD56 19S
	Quality and adequacy of topographic control.	The topography generated from an accurate topographic survey data completed by a registered surveyor and has been used for the current control.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	The sample is collected on a nominal 2kg of material from predetermined locations. this spacing is deemed acceptable for the style of mineralisation.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	No estimation procedures have been applied. Magnetic samples were measured every 3.5 m on average and radiometric samples were measured every 35 m on average, depending on the flying speed of the helicopter. The helicopter maintained an average altimeter elevation of 79.8 m with variation between 10 m and 274 m depending on topography
	Whether sample compositing has been applied.	Sample compositing was not employed at the sampling stage.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Samples were collected from pre determined location on a regular 50m x 50m grid.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	No drilling reported in this report.
Sample security	The measures taken to ensure sample security.	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory which to date has been Bureau Veritas and ALS Santiago. All sample collection was controlled by digital sample control file(s) and hardcopy ticket books.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits have been undertaken.

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Information regarding tenure is included in the Company's December 2025 quarterly report released to the ASX on 27 January 2026. Tesoro Resources Ltd, 95% owned Chilean subsidiary, Tesoro Mining Chile SpA, owns 95.4% of the El Zorro Gold Project Concessions.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Concession is believed to be in good standing with the governing authority and there is no known impediment to operating in the area.

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Little historical exploration has been undertaken in either project area. Coeur d'Alene's Chilean exploration division undertook activities on the Ternera prospect, under an option agreement with the previous owners between April 1990 and January 1993.
Geology	Deposit type, geological setting and style of mineralisation.	The mineralisation model is considered to be an intrusive related gold deposit. The key characteristics that are consistent with this style deposit include: - Low sulphide content, (typically <5%); reduced ore mineral assemblage that typically comprises pyrite and lacks primary magnetite or hematite - Mineralisation occurs as sheeted vein deposits or stockwork assemblages and often combine gold with variably elevated Bi, W, As, Mo, Te, and/or Sb but low concentrations of base metals as seen in the initial four holes by Tesoro at El Zorro - Restricted and commonly weak proximal hydrothermal alteration - Intrusions of intermediate to felsic composition.
Drillhole information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: - easting and northing of the drillhole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar - dip and azimuth of the hole - downhole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	All material information is presented in the report.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	No cutting of grades has been undertaken at this early stage of exploration drilling. Downhole intercepts are calculated using a length weighted averaging method
	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Down hole length weighted average results are calculated using a 0.20g/t Au cut off and a maximum of 5m internal dilution.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalents are reported.
Relationship between mineralisation	These relationships are particularly important in the reporting of Exploration Results.	

Criteria	JORC Code explanation	Commentary
widths and intercept lengths	If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.	The mineralisation forms sub-vertical sheeted veins and individual veins and may form plunging zones within the mineralised structures. Drilling by Tesoro has been undertaken to test these orientations.
	If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').	
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All material assay results from drilling are reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All material exploration data is reported in the body of the report.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).	Further work will be focused on drill testing the Ternera mineralisation and additional prospects as defined in the work program. Core will be used for metallurgical testwork and further resource modelling is planned.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Diagrams have been included in the body of this report.

Analyte	Au	Ag	Al	As	Ba	Be	Bi	Cs	Cd	Ce	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	In	K	La	Li	Mg	Mn	Mo	Ni	Nb	Pb	
Sample ID	p pm 0.001	p pm 0.01	% 0.1	p pm 0.2	p pm 10	p pm 0.05	p pm 0.01	% 0.01	p pm 0.02	p pm 0.01	p pm 0.1	p pm 1	p pm 0.05	p pm 0.2	% 0.1	p pm 0.05	p pm 0.05	p pm 0.1	p ppm 0.005	% 0.01	p pm 0.5	p pm 0.2	% 0.01	p mm 5	p mm 0.05	% 0.01	p pm 0.1	p nm 0.2	
TRC187001	0.007	0.08	7.66	75.7	460	2.12	0.46	1.27	0.22	72.4	14.6	98	6.24	49.2	4.28	19.4	0.08	2.7	0.067	2.63	38.3	29.2	1.37	654	1.02	1.4	13	41.4	
TRC187002	0.037	0.08	7.66	166.5	410	1.87	0.72	1.45	0.12	81	25.7	166	7.34	72	5.06	20.5	0.16	2.1	0.067	2.32	38.5	31.9	2.06	697	1.13	1.71	12.6	87.2	
TRC187003	0.23	0.07	7.81	150	440	2.26	0.87	1.29	0.83	129	83.0	157	10.6	58.6	4.61	20.5	0.12	2.7	0.079	2.75	41.6	28.9	1.24	519	1.12	1.12	13.4	49.3	
TRC187004	0.062	0.13	7.37	249	1370	1.62	0.19	0.62	0.73	116	5.84	138	6.19	23.6	18.3	19.4	0.11	2.7	0.062	2.49	39.6	64	1.53	588	1.15	0.81	14	57.3	
TRC187005	0.004	0.07	7.51	86.6	390	1.99	0.46	1.11	0.25	82.8	20.6	128	6.21	43.3	19.4	0.11	2.2	0.059	2.13	39.9	33.1	1.54	691	0.88	1.4	12.9	76.9		
TRC187006	0.854	0.52	8.14	237	350	2.25	0.3	0.59	0.25	216	28.2	106	7.96	92.6	7.08	21	0.2	3.1	0.067	2.89	96.2	33.3	1.86	485	1.24	0.65	11.9	95.9	
TRC187007	0.007	0.01	8.06	103.5	510	2.31	0.58	0.86	0.31	92.8	16.6	77	5.28	56.7	46.9	20.4	0.11	2.7	0.06	2.71	44.2	30.7	1.24	616	1.32	1.33	14	39.6	
TRC187008	0.045	0.08	8.29	116	510	2.48	0.88	1	0.22	126	25.2	102	8.12	69.7	5.57	21.8	0.12	2.7	0.056	2.77	68.2	32.3	1.58	774	1.82	1.44	14.7	68.4	
TRC187009	0.031	0.17	8.62	216	390	1.8	0.65	1.26	0.12	64.5	25.1	169	5.68	63.9	4.44	17.15	0.08	2	0.057	2.22	31.3	26.1	2.37	563	0.91	1.02	10.7	90.8	
TRC187010	0.002	0.08	7.44	52.4	370	2.16	0.67	1.01	0.23	73.5	15.6	96	6.68	71.8	5.28	18.6	0.08	2.7	0.085	2.14	39	27.6	1.13	567	1.15	1.35	11.9	40.3	
TRC187012	0.008	0.03	7.67	34	280	1.06	0.5	2.11	0.07	33.4	9.8	31	3.13	44.1	2.96	17.5	0.05	1.4	0.033	1.24	16	16.9	11.7	396	1.56	2.45	4.8	17.8	
TRC187013	0.012	0.12	7.4	144.5	330	2.24	0.8	1.23	0.59	23	170.5	217	9	5.22	69.6	6.64	0.85	0.2	1	0.054	2.33	113	29.4	1.8	616	1.41	0.82	10.3	51.7
TRC187014	0.022	0.11	7.86	131	77	1.84	0.45	1.45	0.15	85.5	18.5	83	19.5	41.8	4.08	19.5	0.11	2.4	0.082	2.37	32.1	27.4	1.48	771	0.97	1.47	11.4	48.1	
TRC187015	0.115	0.14	7.82	86.8	420	2.03	1.35	1.28	0.66	93.6	26.5	89	7.03	83.2	5.27	19.5	0.1	2.8											

Analyte	Au	As	Ag	Al	As	Be	Bi	Ca	Cd	Ce	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	In	K	La	Li	Mg	Mn	Mo	Na	Nb	NI	
		ppm	ppm	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	
Sample ID	0.001	0.001	0.01	0.01	0.2	10	0.05	0.01	0.01	0.02	0.1	0.01	0.05	0.2	0.01	0.05	0.05	0.1	0.005	0.01	0.5	0.2	0.01	0.05	0.05	0.01	0.1	0.2	
TRC187096	0.007	0.11	7.75	40.4	490	1.83	0.52	1.15	0.32	68.7	16.9	67	6.04	35.6	4.15	17.05	0.14	2.5	0.069	2.2	32.1	33.3	0.95	901	1.07	1.54	10.7	24.2	
TRC187097	0.008	0.11	7.1	35.1	390	1.67	0.46	1.15	0.24	65.3	19.5	61	6	44.1	4.14	15.45	0.13	2.3	0.072	2.23	30.5	32.5	1.13	974	1.42	1.54	8.8	27.1	
TRC187098	0.005	0.09	7.23	172.5	410	1.77	0.42	1.25	0.5	59.3	20.3	62	5.62	45.5	4.2	17.83	0.13	2.2	0.063	2.13	26.9	34.5	1.23	872	1.12	1.64	9.2	27.6	
TRC187099	<0.001	0.1	8.37	43.3	560	2.08	0.36	1.05	0.4	75.8	17.3	80	6.65	37.3	4.22	19.85	0.16	2.7	0.094	2.82	35.7	31.2	1.08	793	0.97	1.48	12.7	27.9	
TRC187100	0.009	0.09	7.99	30.3	80	1.93	0.23	1.06	0.33	1.91	10.6	33	5.3	40.7	4.33	18.05	0.16	2.6	0.067	3.47	39.7	37.7	1.18	532	1.07	1.4	12.5	25.8	
TRC187102	1.06	1.39	7.19	232	480	2.2	8.44	0.61	0.21	86.2	16.5	107	4.94	80.7	4.84	17.3	0.21	2.8	0.11	2.52	42.7	24.7	1.01	468	1.24	0.97	8.9	33.6	
TRC187103	<0.001	0.12	8.45	32.6	560	2.39	0.4	0.81	0.36	87.1	19	97	6.61	39.4	4.12	21.2	0.19	2.8	0.078	2.92	40.8	29.5	1.12	590	0.74	1.28	13.3	30.1	
TRC187104	<0.001	0.14	8.13	178	530	2.14	0.7	0.94	0.4	95.4	19.9	100	6.62	72.3	4.39	20.4	0.22	2.8	0.085	2.86	44.3	33.5	1.54	786	0.97	1.1	12.8	38.7	
TRC187105	<0.001	0.06	7.66	40	540	1.98	0.35	0.79	0.24	56.1	13.5	86	7.36	30.1	3.95	19	0.16	2.6	0.068	2.56	25.1	30.5	0.88	671	0.94	1.36	12.2	25.5	
TRC187106	<0.001	0.09	7.84	33.9	520	2.15	0.47	0.99	0.31	81.9	14.5	87	7.68	43.4	4.04	18.85	0.19	2.6	0.075	2.62	39	35.7	1.09	707	1	1.38	11.8	28.1	
TRC187107	0.005	0.12	7.56	201	480	1.87	0.75	0.79	0.32	76.5	16.3	114	5.26	65.7	4.05	18.25	0.18	2.5	0.078	2.72	37.7	29.6	1.75	609	1.02	0.99	10.1	39.1	
TRC187108	0.003	0.12	8.16	67.4	480	2.28	0.47	1.07	0.28	81.4	20.9	77	6.86	66.9	4.57	20.1	0.2	2.8	0.075	2.76	38.5	31.6	1.5	761	0.97	1.07	14	12.8	37
TRC187109	<0.001	0.08	7.52	29.3	460	1.90	0.34	1.24	0.44	67.5	20.2	81	7.16	45.6	4.38	19.8	0.18	2.7	0.073	2.26	30.5	38	1.73	878	0.99	1.54	12.1	34.1	
TRC187110	0.002	0.08	7.84	58.4	441	1.85	0.201	0.67	0.38	64.3	18.9	80	6.04	45.6	4.33	18.15	0.16	2.5	0.064	2.46	28.1	32.1	1.27	732	1.02	1.12	9.3	29.8	
TRC187112	0.01	0.08	7.08	29.1	440	1.73	0.37	1.08	0.38	66.8	17.6	68	5.51	37.8	3.99	16.3	0.18	2.2	0.07	2.23	31.4	29.6	1.27	719	1.02	1.38	8.9	29.4	
TRC187113	0.011	0.11	7.33	45.5	400	1.51	0.68	2.05	0.23	49.3	31.3	187	6.87	58.8	4.85	18.75	0.16	1.4	0.063	1.69	22.8	29.8	2.74	812	0.78	1.92	9.7	142.5	
TRC187114	0.003	0.06	6.87	50.5	510	1.81	0.38	1.24	0.14	75.1	27.9	155	8.5	49.1	4.84	17.6	0.19	1.6	0.062	2.05	34.3	32.1	2	836	0.81	1.38	11.2	100.5	
TRC187115	<0.002	0.09	7.92	45.6	420	1.77	0.87	1.24	0.48	97.3	24.3	65	5.71	78.2	4.22	17.8	0.2	2.4	0.06	2.25	44.2	37.8	2.12	823	0.87	1.59	9.1	32.3	
TRC187116	<0.001	0.11	7.31	200	510	1.96	0.95	0.81	0.24	96	16.6	66	4.97	120	4.6	17.5	0.2	2.6	0.075	2.47	46.8	20.9	1	447	0.89	1.25	7.9	31.9	
TRC187117	0.01	0.24	7.46	91.4	420	1.86	0.38	0.8	0.25	227	31.3	98	11	57.4	4.7	17.55	0.42	2.2	0.07	2.64	127.5	31.7	1.78	603	0.75	0.75	9.8	68.8	
TRC187118	<0.001	0.07	6.56	24.2	390	1.37	0.27	1.77	0.11	51	28.3	201	4.96	55.9	4.62	16.45	0.16	1.8	0.067	1.72	23.5	25.4	2.78	729	0.56	1.42	10.4	134	
TRC187119	<0.001	0.07	7.22	340	380	1.6	0.27	1.78	0.13	61.2	38.1	234	7.4	58.1	5.93	20.2	0.17	1.8	0.074	1.87	26	35.7	3.11	825	0.76	2.03	13.5	112.5	
TRC187120	0.01	0.06	7.86	46.9	410	1.65	0.68	1.86	0.62	69.2	18.5	186	6.92	55.5	5.24	17.5	0.15	2.2	0.085	2.29	16.1	31	2.22	977	0.56	1.27	9.3	103.5	
TRC187122	<0.001	0.05	7.93	46.5	490	1.54	0.66	1.71	0.18	64.8	14.1	110	6.7	64.6	4.92	19.85	0.16	2.7	0.077	2.09	32.3	36.4	1.57	558	1.36	1.35	10.7	29.9	
TRC187123	<0.001	0.05	7.74	62.9	460	1.69	0.54	1.21	0.38	67.6	17.9	88	7.1	42	4.41	19.8	0.15	2.5	0.079	2.01	32	39.3	1.16	778	1.04	1.6	11.6	34.1	
TRC187124	<0.001	0.07	7.56	53.1	470	1.87	0.56	1.2	0.54	70.9	16.1	63	5.59	54.7	3.9	18	0.15	2.3	0.06	2.38	33.3	29.4	1.26	824	1.05	1.44	9.5	29.5	
TRC187125	<0.001	0.08	7.75	42.2	470	2.07	0.45	1.09	0.49	83.8	17.6	68	6.46	51.2	4.11	19.15	0.16	2.5	0.065	2.56	39.3	31.6	1.31	772	0.98	1.25	11.5	32.8	
TRC187126	<0.001	0.1	7.13	105	470	1.91	0.86	0.91	0.42	74.1	17.1	67	5.72	57.9	3.99	18.2	0.15	2.4	0.062	2.48	34.3	30.2	1.3	742	0.96	1.21	9.7	28.4	
TRC187127	<0.001	0.06	7.75	40.1	450	1.7	0.45	1.13	0.35	85.3	16.5	73	5.45	45.2	3.63	16.25	0.15	2.3	0.053	2.11	43.5	25.8	1.1	691	0.87	1.29	10.7	30.8	
TRC187128	<0.001	0.07	7.55	31.1	410	1.45	0.52	1.91	0.19	58	19	56	5.19	66.6	3.72	18.6	0.13	2	0.053	1.9	28	28.2	1.56	886	0.95	1.93	7.2	33.3	
TRC187129	<0.001	0.08	6.30	44.1	730	1.21	0.36	1.06	0.42	60.7	13.2	312	5.34	121.5	4.87	14.9	0.16	2.2	0.068	1.91	34	34	4.46	821	0.59	1.21	6.1	117.5	
TRC187130	<0.001	0.06	6.7	38.6	340	1.39	0.69	1.7	0.75	28.6	27.3	50	5.29	75.9	4.6	16.05	0.17	2.2	0.068	1.57	37	26.2	4.14	1020	0.87	1.59	6.8	113	
TRC187132	<0.001	0.05	7.03	34.6	340	1.34	0.49	2.94	0.18	66.1	29.8	265	6.39	64.3	4.65	18	0.16	2.1	0.095	1.62	30.1	31.8	3.38	1065	1.15	1.73	7.2	140	
TRC187133	<0.001	0.05	6.1	46.6	270	1.1	0.41	4.78	0.17	67.2	41.5	453	6.21	51.2	5.67	15.55	0.19	2.1	0.1	1.47	28.5	30	6.42	1215	0.67	1.2	5.8	217	
TRC187134	<0.001	0.05	7.72	37.2	410	1.6	0.4	1.5	0.26	57.7	15.5	46	5.31	37.9	3.49	18.05	0.12	1.9	0.048	2.08	26.5	24.1	0.99	642	0.79	1.95	7.6	23.4	
TRC187135	0.011	0.1	6.52	73.9	390	1.62	0.69	1.22	0.26	52.8	19.7	97	5.17	51.7	3.91	17.8	0.15	1.8	0.059	2.16	23.1	26.5	1.6	758	0.84	1.39	9.1	56.1	
TRC187136	<0.001	0.06	5.86	40.3	300	1.22	0.34	3.31	0.21	65.6	37.6	360	6.86	44.1	4.69	14.6	0.16	1.8	0.062	1.73	29.9	27.2	5.68	997	0.71	1.04	6.3	200	
TRC187137	0.004	0.08	7.66	31.8	370	1.61	0.97	1.72	0.42	80.9	22.2	51	6.3	69.2	4.46	18.65	0.16	1.9	0.056	2.01	41.8	30.3	1.73	835	1.27	1.91	7.6	27.8	
TRC187138	<0.001	0.06	7.66	32.4	340	1.65	0.92	1.23	0.19	133	19.9	60	6.68	62.8	4.64	18.85	0.27	2.1	0.056	1.81	83.3	25.9	1.53	590	1.02	1.48	8.9	37.3	
TRC187139	0.006	0.08	6.24	118.5	240	1.18	0.24	1.98	0.24	54.8	21.9	54	5.29	58.4	3.1	16.05	0.12	2.5	0.05	1.84	21.1	24.3	1.73	809	1.12	1.62	8.7	25.5	
TRC187140	0.018	0.07	7.33	31.9	400	1.71	0.98	1.35	0.49	95.5	20.9	52	6.06	70.9	4.29	18.35	0.19	2.1	0.064	2.34	49.6	29.7	2.18	748	0.88	1.44	8.6	26.3	
TRC187142	<0.001	0.06	7.61	20.9	360	1.53	0.69	1.66	0.33	70.8	17.6	40	4.55	53.2	3.88	18.1	0.16	1.6	0.053	1.91	35.8	24.9	1.81	639	0.79	1.77	7.1	23.1	
TRC187143	0.009	0.07	7.19	21.8	470	1.8	0.49	1.17	0.56	79.3	13.9	54	4.9	55.7	3.74	16.05	0.16	1.7	0.068	2.26	40.3	24.2	1.25	734	0.93	1.59	7.7	24.6	
TRC187144	<0.001	0.09	7.5	19.8	370	1.35	0.47	2.05	0.69	51	18.9	132	5.01	45.1	4.13	16.75	0.13	1.5	0.076	1.99	25.1	31.7	2.91	1000	0.97	1.76	6.4	77	
TRC187145	0.006	0.11	7.48	22	340	1.37	0.96	1.84	0.72	61.6	20																		

Analyte	Au	Ag	Al	As	Ba	Be	Bi	Cs	Cd	Ce	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	In	K	La	Li	Mg	Mn	Mo	Na	Nb	Ni	
Sample ID	p pm 0.001	p pm 0.01	% 0.1	p ppm 0.2	p ppm 10	p ppm 0.05	p ppm 0.01	% 0.01	p ppm 0.02	p ppm 0.01	p ppm 0.1	p ppm 1	p ppm 0.05	p ppm 0.2	% 0.01	p ppm 0.05	p ppm 0.05	p ppm 0.1	p ppm 0.005	% 0.01	p ppm 0.5	p ppm 0.2	% 0.01	p ppm 5	% 0.05	% 0.01	p ppm 0.1	% 0.2	
TRC187192	0.01	0.1	6.84	31.3	390	2.35	0.73	2.86	0.75	57.7	8.2	21	5.23	29.6	2.4	17.25	0.08	1	0.087	3.65	26.1	46.8	1.71	834	0.87	0.85	11	12.4	
TRC187193	0.016	0.1	7.79	22.9	520	3.11	0.71	1.54	0.42	68.7	9.7	20	4.84	52.1	2.66	19.9	0.09	1.4	0.124	3.23	26.2	45.4	1.22	723	0.79	0.52	11.6	14	
TRC187194	0.0025	0.1	7.12	31	490	2.29	0.79	1.14	0.35	57.8	8.8	37	4.49	33.8	2.81	17.2	0.1	0.9	0.085	2.96	26.1	33.6	1.07	789	0.84	1.32	11.5	16.4	
TRC187195	0.025	0.14	7.76	73.1	480	2.89	1.05	0.85	0.43	72.7	12.8	43	5.77	28.1	3.16	21.2	0.15	0.8	0.129	3.88	32	30.4	1.09	789	0.86	1.1	13	18.2	
TRC187196	0.001	0.01	7.04	19.1	610	2.31	0.47	0.72	0.13	64.7	9.6	30	6.54	24.3	3.01	21.6	0.07	0.094	3.42	16.1	36.4	1.21	582	0.94	0.58	11.6	16.4		
TRC187197	0.004	0.07	7.51	42.7	480	2.67	0.64	1.41	0.34	75.2	11.5	22	4.14	41.1	3.29	19.45	0.18	1.5	0.071	3.43	38.3	36.1	1.79	815	1.01	1.75	10.9	15.1	
TRC187198	<0.001	0.03	7.6	10.8	380	2.97	0.44	0.84	0.18	49.3	6.4	19	3.32	20.8	3.04	15.8	0.13	1.3	0.063	3.12	25.4	27.3	0.92	616	0.68	2.09	9.9	10.2	
TRC187199	0.001	0.04	7.61	12.8	390	3.16	0.66	1.22	0.31	58.3	6.8	16	4.4	25.3	2.74	19.75	0.17	1.5	0.084	3.83	29.1	28.6	0.73	504	0.6	2.18	12.5	11.1	
TRC187200	0.06	0.13	8.38	75.6	620	2.77	0.39	0.59	0.15	73.8	8.9	32	7.88	33.7	3.51	24.1	0.19	0.9	0.077	4.52	33.8	40	1.04	642	1.04	0.8	15.1	11.6	
TRC187202	0.003	0.09	7.36	65.6	490	2.7	0.53	1.07	0.28	62.2	11.5	30	6.41	38.5	3.35	19.9	0.16	1	0.111	3.24	28.9	33.3	1.23	742	0.93	1.35	12.9	16.5	
TRC187203	0.005	0.07	7.29	835	470	2.45	0.82	0.63	0.41	73.2	22.9	33	5.26	26.4	2.98	20.2	0.19	0.9	0.109	3.96	46.3	28	1.1	695	0.96	0.83	12.8	16	
TRC187204	0.001	0.05	7.4	17.2	500	2.3	0.26	0.74	0.18	56.7	9.1	42	6.23	25.2	3.17	19.7	0.16	1.1	0.066	3.79	27.4	37.6	0.92	564	0.92	1.49	13.1	18.1	
TRC187205	0.004	0.05	7.14	29.7	500	2.05	0.42	1.05	0.23	70.2	10.2	41	6.39	26.5	3.11	18.2	0.14	1.1	0.081	3.15	33	33.7	1.26	724	0.68	1.48	12.4	18.6	
TRC187206	0.002	0.07	7.15	40.8	490	1.95	0.48	1.19	0.15	68.8	11.95	49	5.52	30.9	3.62	18.6	0.15	1.1	0.089	3.09	36.1	31.5	1.42	791	0.68	1.52	11.5	18.1	
TRC187207	0.014	0.05	8.24	20.6	510	2.09	0.76	0.82	0.12	92	9.5	43	8.68	27.9	4.4	25.6	0.16	1.1	0.114	3.52	46.3	32.7	1.01	539	0.79	1.57	18.3	16.4	
TRC187208	0.008	0.03	7.75	18.8	510	2.47	0.46	0.82	0.19	106.5	7.8	33	6.93	25.7	3.57	24	0.18	1	0.114	3.69	51.5	28.4	1.08	601	1.14	1.74	17.2	13.4	
TRC187209	0.007	0.05	7.28	79.2	530	2.15	0.28	1.16	0.4	74.5	10.7	28	4.82	24.2	2.95	19.45	0.18	0.9	0.085	3.49	33.5	37.3	1.11	760	0.69	1.48	13.5	16	
TRC187210	0.001	0.01	6.82	20.1	530	2.01	0.21	0.69	0.19	58.3	6.5	26	3.85	16.8	2.46	18.2	0.12	0.8	0.061	3.51	27.8	28.4	0.69	560	0.75	1.42	11.7	11.6	
TRC187212	0.009	0.01	7.35	26.9	500	2.48	0.43	0.59	0.09	77.1	8.5	31	6.14	20.9	3.06	19.9	0.15	0.7	0.078	3.49	36.9	31.6	0.8	631	0.79	1.27	14.2	13	
TRC187213	<0.001	0.04	7.58	16.6	520	2.38	0.31	0.63	0.07	61.3	7.4	28	4.82	20.8	2.7	19.7	0.16	0.7	0.101	3.85	29.4	22	0.59	503	0.77	1.64	12.9	12.3	
TRC187214	0.001	0.04	6.97	16.3	540	1.97	0.63	0.76	0.2	62.1	7.8	28	4.15	24.7	2.6	16.9	0.16	0.8	0.088	3.55	29.4	28.2	0.76	677	0.7	1.24	10.9	12.7	
TRC187215	0.003	0.04	7.72	28.9	470	2.22	0.73	1.33	0.15	74.5	14.8	54	5.91	46.8	3.65	20.3	0.17	1.3	0.125	3.33	34.8	41.6	1.29	899	0.63	1.06	13.3	24.7	
TRC187216	0.002	0.03	6.68	19.5	520	1.93	0.68	0.91	0.13	65.8	10.15	47	4.1	23.2	3.12	16.1	0.12	0.9	0.094	3.27	29.1	21.6	0.81	791	0.68	1.27	10.8	14.3	
TRC187217	0.003	0.07	6.7	94.9	530	2.25	3.63	0.61	0.21	57.5	12.2	21	4.52	51.4	2.63	17.3	0.13	1	0.099	4.09	27.4	24.5	0.59	674	0.77	1.15	13.5	13.9	
TRC187218	0.002	0.05	8.5	37.2	500	2.75	0.46	0.86	0.1	89.2	13	31	6.58	19.9	3.46	24	0.21	0.7	0.092	4.35	43.4	25.7	0.9	578	1.02	1.56	16.5	17.5	
TRC187219	0.007	0.04	7.49	18.6	600	2.3	0.23	0.48	0.12	50.1	6.5	23	4.19	17.2	2.53	19.6	0.14	0.8	0.11	4.42	24.6	31.7	0.64	640	0.64	1.07	13.9	11.2	
TRC187220	0.035	0.08	7.1	64	360	2.95	0.78	2.44	0.14	55.1	11.4	20	5.79	35.9	2.8	18.25	0.11	1.1	0.081	3.1	25	34.3	1.63	615	0.79	0.78	9.5	13.6	
TRC187222	0.002	0.05	7.02	89.8	540	2.17	0.68	0.73	0.3	62.6	10.6	34	7.4	42	3	17.95	0.11	1.3	0.077	2.94	28.4	32.3	0.87	670	0.84	1.48	11.8	19.6	
TRC187223	0.01	0.09	7.05	52.5	520	2.09	0.68	1.23	0.17	73.1	7.6	27	5.82	31.1	3.05	18.95	0.12	0.9	0.081	3.19	33.4	29.5	0.76	617	1.16	1.7	13.2	14.2	
TRC187224	0.005	0.03	8.42	17.6	490	2.47	0.88	0.71	0.05	86.7	8.8	35	6.33	55.4	3.73	23.5	0.15	1.1	0.095	4.24	36.6	28.4	0.73	651	0.83	1.64	17.1	15.1	
TRC187225	0.01	0.04	8.04	35.38	560	2.37	0.83	0.99	0.03	73.7	8.91	32	5.91	36.8	3.25	22.3	0.14	0.9	0.1	3.7	25.3	37.7	34.3	1.03	715	1.07	1.4	14.3	13
TRC187226	0.001	0.04	7.57	18.8	580	2.45	0.42	0.8	0.26	74.8	80	32	5.37	29.9	3.35	19.25	0.14	1.2	0.087	3.26	35.2	28.5	1.23	732	0.73	1.27	13.7	16.7	
TRC187227	0.005	0.03	6.88	26.3	460	2.19	0.42	0.96	0.12	60	8.9	29	6.23	26.3	3.05	16.85	0.12	1.1	0.08	3.25	29.6	30.4	0.94	654	0.99	0.98	11.1	14.9	
TRC187228	0.004	0.04	7.06	14.4	480	2.19	0.38	1.79	0.3	65	9.5	31	5.69	31.9	3.29	18.35	0.13	1.2	0.08	2.98	31.2	34.9	1.32	733	0.87	1.38	13.5	16.5	
TRC187229	0.047	0.2	6.19	187.5	310	2.14	2.97	2.32	1.22	67	21.5	28	6.78	20.7	7.3	21.3	0.18	1.2	0.443	2.04	40.6	32.9	1.84	646	1.48	0.87	12	23.4	
TRC187230	0.001	0.04	8.79	41.7	690	2.96	0.52	0.49	0.24	84	14.7	51	8.89	40.9	4.48	22.6	0.15	2	0.039	3.22	39.4	59.6	1.26	704	0.85	0.86	15.9	29.1	
TRC187232	0.007	0.08	6.68	33.2	530	2.17	0.69	0.6	0.12	56.8	7.9	28	5.71	43	3.07	20.1	0.12	1.1	0.09	3.39	25.4	32.4	0.76	632	0.67	1.56	15.1	14.6	
TRC187233	0.008	0.08	7.26	45.8	510	2	0.91	1.03	0.35	84.1	9.8	30	5.35	41.2	3.17	18.85	0.17	1	0.085	3.34	41.2	33.4	0.96	796	1	1.59	12.2	15.9	
TRC187234	0.026	0.08	7.24	65.8	460	2.52	1.89	0.56	0.16	75.4	13.6	29	4.88	74.3	4.09	19.85	0.15	1.3	0.067	3.1	36.5	32.2	0.94	723	1.06	1.33	13.1	17.8	
TRC187235	0.003	0.04	7.093	25.23	390	2.23	0.79	0.55	0.22	63.3	9.39	25	5.35	32.2	3.14	23.5	0.12	0.9	0.1	3.7	25.3	37.7	34.3	1.03	715	1.07	1.4	14.3	13
TRC187236	0.003	0.06	7.86	51.6	350	2.42	0.46	1.16	0.16	54.8	12.2	25	5.5	35.2	3.26	19.1	0.12	1.3	0.099	3.26	25.6	38.4	1.19	653	0.86	0.77	9.3	16.4	
TRC187237	0.002	0.03	6.86	20.1	470	2.18	0.52	0.61	0.32	46.5	7.3	14	3.62	27	2.24	16.1	0.1	1.3	0.061	3.58	22	23	0.59	583	0.82	1.87	9.4	11	
TRC187238	0.001	0.06	8.12	49.1	320	3.51	0.43	1.41	0.18	69.2	7.9	21	9.53	23.8	2.54	20.3	0.13	1	0.082	3.01	27.8	47	0.92	630	0.85	0.24	12.8	12.5	
TRC187239	0.022	0.03	7.81	60.7	430	2.62	2.61	0.7	0.08	69.2	7.2	27	5.44	33.6	3.71	20.5	0.14	1.1	0.098	4.45	31.5	32.3	0.91	645	0.89	0.58	12.5	13.6	
TRC187240	0.001	0.04	7.29	19	460	2.52	0.77	0.85	0.41	53.2	10	17	4.56	46.5	2.82	18.02	0.14	1.5	0.075	3.14	24	26.8	0.67	643	0.66	2.18	9.9	12.8	
TRC187242	0.001	0.01	7.14	19																									

tesoro Gold

Method Analyte	Au-ICP21 Au ppm 0.001	ME-MS61 Ag ppm 0.01	ME-MS61 Al % 0.01	ME-MS61 As ppm 0.2	ME-MS61 Ba ppm 10	ME-MS61 Be ppm 0.05	ME-MS61 Bi ppm 0.01	ME-MS61 Ca % 0.01	ME-MS61 Cd ppm 0.02	ME-MS61 Ce ppm 0.01	ME-MS61 Co ppm 0.1	ME-MS61 Cr ppm 1	ME-MS61 Cs ppm 0.05	ME-MS61 Cu ppm 0.2	ME-MS61 Fe % 0.01	ME-MS61 Ga ppm 0.05	ME-MS61 Ge ppm 0.05	ME-MS61 Hf ppm 0.1	ME-MS61 In ppm 0.005	ME-MS61 K % 0.01	ME-MS61 La ppm 0.5	ME-MS61 Li ppm 0.2	ME-MS61 Mg % 0.01	ME-MS61 Mn ppm 5	ME-MS61 Mo ppm 0.05	ME-MS61 Na % 0.01	ME-MS61 Nb ppm 0.1	ME-MS61 Ni ppm 0.2
Sample ID	0.001	0.01	0.01	0.2	10	0.05	0.01	0.01	0.02	0.01	0.1	1	0.05	0.2	0.01	0.05	0.05	0.1	0.005	0.01	0.5	0.2	0.01	5	0.05	0.01	0.1	0.2
TRC187383	0.021	0.14	7.5	99.3	420	1.86	0.92	0.53	0.1	66.1	21.3	65	5.93	29.4	4.08	18.65	0.05	1.3	0.061	2.23	31.8	31.8	1.24	944	3.81	0.75	8.7	34.5
TRC187384	0.001	0.06	7.6	24.3	540	2.44	0.28	0.36	0.1	88.5	15.5	62	6.76	23.2	3.8	20.4	0.05	1.7	0.055	2.62	42.3	35.2	1.05	686	1.49	0.96	12.2	32.8
TRC187385	0.044	0.09	7.91	54.7	360	2.11	0.31	1.28	0.07	76.1	26.4	128	6.57	22.5	4.89	20.1	0.06	1.5	0.084	1.87	31.7	43.1	2.42	841	1.84	0.98	8.6	69.4
TRC187386	0.001	0.06	8.83	16.8	570	2.49	0.31	0.35	0.12	86.3	14.3	69	4.86	29	4.33	22.6	<0.05	2.6	0.071	3.05	38.3	42.9	1.05	637	2.05	0.88	13.6	32.2
TRC187387	0.023	0.11	8.65	36.5	530	2.37	0.54	0.39	0.09	80.8	15.3	68	4.69	32.1	4.49	20.6	0.05	2.2	0.063	3.07	37.9	31.8	1.39	512	2.98	0.66	10.3	29.9
TRC187388	0.057	0.09	8.5	219	590	2.39	1.79	0.45	0.05	73.7	28.2	92	6.86	32.2	5.3	21	0.06	2.3	0.088	3.01	33.3	35.1	1.04	645	2.75	0.77	11	40.9
TRC187389	0.006	0.13	6.96	32.6	490	2.06	0.28	0.42	0.16	68.6	14	69	4.02	24.8	3.4	16.85	0.05	1.6	0.046	2.23	34.2	29	1.34	696	1.32	0.9	10.1	28.7
TRC187390	0.025	0.17	7.8	94.7	590	2.31	0.83	0.57	0.14	65.9	25.2	93	5.19	182	3.55	19.3	<0.05	2	0.09	2.83	31.8	28.9	1.28	678	2.38	0.87	9.5	36.2
TRC187392	0.03	0.11	8.07	80.9	570	2.19	0.37	0.88	0.17	77.4	18.8	112	3.6	35.7	3.86	19.85	0.06	2	0.067	2.55	34.6	24.5	1.82	468	3.67	1.23	9.5	30.9
TRC187393	0.016	0.23	7.17	44.4	410	1.89	0.56	0.55	0.19	71	19.7	83	4.8	48.6	3.79	17.45	0.07	1.6	0.062	1.95	31	31.6	1.81	682	2.34	1.34	8.5	43.5
TRC187394	0.008	0.11	6.57	51.9	480	1.92	0.57	0.43	0.29	66.4	13.8	60	4.29	36	3.34	17.65	0.06	1.5	0.052	2.27	32	29.3	1.42	567	1.48	0.9	8.7	28.6
TRC187395	0.047	0.11	7.51	97.1	480	1.97	0.84	0.4	0.22	74.2	16	82	5.68	40.2	4.07	19.25	0.08	1.7	0.073	2.54	35.2	26.8	1.3	702	6.76	0.84	8.2	33.3
TRC187396	0.102	0.23	6.46	200	310	1.48	0.99	1.51	0.12	64.4	38.8	243	3.85	57	7.2	16.95	0.09	1.5	0.073	1.8	31.9	41.2	2.59	1125	5.76	0.38	8.1	175
TRC187397	0.004	0.08	5.17	45	390	1.6	0.58	0.43	0.12	63.9	9.4	42	3.57	31.5	2.77	12.6	0.08	1.6	0.042	1.6	27.7	25.6	0.55	474	1.43	1.12	8.4	18.2
TRC187398	0.108	0.09	7.42	193.5	460	2.12	0.75	0.23	0.07	70.7	19.6	56	4.15	48.6	5.58	18.8	0.08	2	0.068	2.24	31.3	36.3	0.95	419	3.84	0.42	7.1	32.1
TRC187399	0.01	0.29	6.94	88.5	520	1.9	1.86	0.32	1.58	68.5	12	94	4.55	40.6	3.76	17.1	0.08	1.6	0.089	2.42	31.8	28.4	0.97	830	4.36	0.81	7.8	31.7
TRC187400	0.01	1.36	6.3	79.2	430	1.61	18	0.65	2.08	62.5	11.1	84	3.76	46.6	3.48	15.15	0.06	1.6	0.114	1.95	28.8	23.8	1.08	740	4.15	1.19	8	30.2
TRC187402	0.001	0.08	6.88	34.8	510	2.03	0.65	0.37	0.2	74.1	16.2	51	5.18	29.5	3.17	17.05	0.08	1.5	0.057	2.2	34.4	24.6	0.97	706	1.52	0.98	9.4	28.1
TRC187403	0.003	0.11	8.29	48.4	650	2.49	0.48	0.91	0.24	95.2	20.8	72	5.62	30.4	4.32	21.3	0.08	2.9	0.075	2.9	43.8	38.4	1.32	930	1.7	0.69	10.8	36.7
TRC187404	0.009	0.12	7.42	70.3	640	2.32	0.69	0.45	0.17	87.4	17.1	58	4.92	38.8	4.14	20.1	0.08	2.2	0.085	2.7	41.8	31.1	1.12	760	1.84	0.55	9.9	31
TRC187405	0.08	0.16	6.59	145.5	490	1.98	1.37	0.35	0.15	66.3	17	61	4.07	32	4.93	16.1	0.1	1.7	0.057	2.33	32.5	28.5	0.96	754	1.58	0.58	7.8	28.7
TRC187406	0.009	0.1	7.33	70.9	790	2.44	0.53	0.29	0.05	85.4	15.6	61	4.19	38.9	3.91	19.5	0.09	2.1	0.073	2.64	39.7	30.6	0.77	609	1.56	0.75	10.8	31.2
TRC187407	0.009	0.1	6.59	41.8	480	1.89	0.47	0.58	0.19	65.7	12.6	64	4.28	25.7	3.21	17.25	0.08	1.4	0.05	2.18	30.9	28.6	1.12	886	1.39	1.04	8.9	27.9
TRC187408	0.019	0.09	5.5	47	450	1.74	0.98	0.34	0.11	62.9	11.2	48	3.48	30.7	3.13	12.85	0.09	1.8	0.048	1.92	28.7	23.2	0.65	591	1.16	0.85	8.5	18.9
TRC187409	0.018	0.12	7.74	49.9	950	2.35	0.78	0.48	0.21	88.5	29.7	62	5.78	66.8	4.66	20	0.09	2.4	0.067	2.42	37	37.4	1.07	1190	2.13	0.97	11	45.3
TRC187410	0.006	0.1	7.29	82.4	590	2.27	0.96	0.49	0.21	83	21.4	55	5.55	47.5	4.43	17.5	0.1	2.2	0.068	2.33	37.2	38.6	0.87	966	1.84	0.93	10.4	31.3
TRC187412	0.003	0.1	5.51	56	410	1.62	0.86	0.4	0.12	62.9	10	50	3.75	32.1	3.06	13.15	0.08	1.8	0.05	1.88	29.3	22.8	0.52	534	1.31	0.84	8.7	18.4

Analyte	P	Pb	Rb	Re	Se	Sr	Ta	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr	NORTHING	EASTING	ELEVATION	TARGET				
Sample ID	p ppm 10	pb ppm 0.5	rb ppm 0.1	re ppm 0.002	s % 0.01	sb ppm 0.05	sc ppm 0.1	se ppm 0.1	sn ppm 0.2	sr ppm 0.2	ta ppm 0.05	te ppm 0.05	th ppm 0.01	ti % 0.005	tl ppm 0.02	u ppm 0.1	v ppm 1	w ppm 0.1	y ppm 0.1	zn ppm 2	zr ppm 0.5				
TRC187001	380	12.1	128	0.002	0.03	0.99	15.5	1	3.4	176	1.02	<0.05	13.05	0.494	0.71	1.7	128	2.4	20.2	95	88.3	7036700	341600	639	DROME HILL
TRC187002	540	12.3	132.5	<0.002	0.18	0.94	16.4	1	3.4	182.5	0.85	0.08	10.4	0.536	0.65	1.7	139	2.5	24.3	108	74.8	7036700	341550	641	DROME HILL
TRC187003	350	15.1	150.5	<0.002	0.01	1.18	16.5	1	4.3	153	1.02	0.12	13.5	0.471	0.82	2	131	3.3	27.3	143	92	7036750	341550	671	DROME HILL
TRC187004	350	11.9	125	<0.002	0.02	1.75	15.1	1	2.8	199.5	0.89	0.08	13.9	0.478	0.59	2.4	131	2.6	23.1	132	82.0	7036700	341600	650	DROME HILL
TRC187005	470	14.7	117	<0.002	0.01	1.3	15.8	1	2.8	199.5	0.98	0.08	12	0.521	0.77	1.6	123	2.7	26.6	107	76.1	7036800	341600	650	DROME HILL
TRC187006	900	15.8	128.5	<0.002	0.02	2.46	16.9	<1	3.6	118.5	0.91	0.32	17.05	0.404	0.73	2.7	141	5.4	43.4	121	114	7036800	341550	687	DROME HILL
TRC187007	640	13.1	122	<0.002	0.02	1.07	16.3	2	3.3	175.5	1.09	0.11	15.1	0.501	0.66	2.1	128	3.5	21.5	96	91.2	7036850	341550	701	DROME HILL
TRC187008	590	18.3	144	<0.002	0.02	1.26	18.4	1	3.2	172.5	1.14	0.11	19	0.516	0.84	2.3	128	4.9	32.8	93	91.6	7036700	341450	642	DROME HILL
TRC187009	400	10.4	111	<0.002	0.02	1.06	15.7	1	2.8	129	0.81	0.07	10.4	0.447	0.57	1.3	148	3.1	25	85	73.2	7036700	341500	657	DROME HILL
TRC187010	370	12.3	122.5	<0.002	0.02	0.99	15.1	1	3	182	0.92	0.1	13.1	0.438	0.67	2.4	117	2.7	29.9	102	91.9	7036700	341500	680	DROME HILL
TRC187012	500	11.8	54.4	<0.002	0.01	0.46	8.7	<1	1.5	379	0.37	<0.05	4.81	0.268	0.33	0.7	82	0.9	14.1	78	42.4	7036750	341500	688	DROME HILL
TRC187013	620	13	104.5	<0.002	0.02	1.63	14.4	1	2.5	117	0.7	0.06	16.45	0.355	0.6	2.2	121	3.5	36.9	82	82.3	7036850	341600	670	DROME HILL
TRC187014	1070	15.4	114.5	<0.002	0.01	1.2	17.9	<1	3.4	259	0.94	0.2	14.1	0.486	0.66	1.8	124	4.5	41.8	141	81.5	7036700	341550	716	DROME HILL
TRC187015	830	15.9	120	<0.002	0.02	1.03	17.7	1	3.4	233	0.89	0.09	12.5	0.476	0.71	2.1	125	3.5	29.7	152	88	7036850	341550	699	DROME HILL
TRC187016	670	15.1	154	<0.002	0.02	2.55	17.4	1	3.5	173	1.04	0.07	16.2	0.481	0.82	1.9	133	4.2	37.2	159	94.1	7036800	341550	686	DROME HILL
TRC187017	500	18	120.5	<0.002	0.02	1.4	15.8	1	3.7	243	0.87	0.13	10.9	0.466	0.73	1.8	115	2.9	27.3	154	78.3	7036800	341500	705	DROME HILL
TRC187018	1050	10.9	132.5	<0.002	0.01	1.47	15.3	1	2.6	120	0.8	0.05	12.1	0.383	0.68	1.3	107	8.4	20.4	159	55.4	7036700	341350	622	DROME HILL
TRC187019	500	13.7	155	<0.002	0.02	2.66	18.4	<1	3.4	153.5	1.04	0.11	14.65	0.542	0.89	1.9	141	4.7	30.6	135	87.5	7036700	341300	638	DROME HILL
TRC187020	730	14.7	124	<0.002	0.02	2.42	15.6	1	3.4	144.5	0.73	0.21	11.9	0.402	0.61	1.3	125	5.4	20.5	129	78.7	7036700	341400	671	DROME HILL
TRC187022	370	15.2	107.5	<0.002	0.01	0.92	11.2	1	2.6	163	0.67	0.11	10.25	0.399	0.55	1.4	93	4.5	17.3	111	66.5	7036750	341300	632	DROME HILL
TRC187023	850	16.9	137.5	<0.002	0.01	13.75	18.3	2	7.4	149.5	0.42	0.21	6.55	0.354	0.69	1.4	139	27.2	22.4	360	46.5	7036800	341350	643	DROME HILL
TRC187024	1070	17.3	127.5	<0.002	0.01	3.55	20.7	<1	3.4	145.5	0.43	0.2	14.1	0.357	0.52	1.4	139	12.2	19.2	164	40.9	7036700	341300	662	DROME HILL
TRC187025	660	20	106	<0.002	0.03	1.2	13	1	3.8	148.5	0.79	0.14	12.4	0.4	0.62	1.8	98	3.8	22.7	204	77.7	7036850	341400	673	DROME HILL
TRC187026	620	14.9	102.5	<0.002	0.04	1.82	12.3	1	5.5	173.5	0.73	0.08	10.75	0.37	0.59	1.5	93	11.2	16.9	187	59.6	7036850	341300	624	DROME HILL
TRC187027	610	12.8	91.7	<0.002	0.01	0.87	9.5	<1	3.3	130.5	0.7	0.06	10.95	0.292	0.49	1.5	73	4.1	15	104	55.5	7036800	341300	613	DROME HILL
TRC187028	750	12.6	96.1	<0.002	0.01	1.61	11.2	1	3.3	234	0.54	0.13	8.21	0.322	0.5	1.3	80	4.5	19.9	190	55.8	7036750	341300	610	DROME HILL
TRC187029	400	15	118	<0.002	0.02	1.27	14.3	1	5.2	162	0.84	0.08	12.5	0.415	0.66	1.8	103	3.7	21.1	115	75.5	7036850	341350	652	DROME HILL
TRC187030	400	15.1	108.5	<0.002	0.02	1.08	15.1	1	3.6	225	0.74	0.1	10.25	0.44	0.68	1.3	106	4.5	18.2	120	65	7036800	341250	601	DROME HILL
TRC187032	1060	16.2	108	<0.002	0.03	1.07	14.1	1	2.4	218	0.76	0.09	10.3	0.441	0.61	1.3	95	1.8	17.4	85	74.6	7037150	341250	791	DROME HILL
TRC187033	350	16.8	112	<0.002	0.02	1.08	15.4	1	2.6	209	0.82	0.09	11.0	0.419	0.68	1.6	106	1.7	19.4	114	79.9	7036700	341300	796	DROME HILL
TRC187034	1060	20.3	160	<0.002	0.07	10.43	17.9	2	7.8	218	0.75	0.11	11.25	0.495	0.69	1.4	107	2.5	18	96	73.8	7037100	341300	765	DROME HILL
TRC187035	350	15.4	106.5	<0.002	0.02	1.17	11.2	1	2.7	141.5	0.62	0.11	10.5	0.328	0.57	1.4	87	2.3	13.9	71	66.7	7037100	341250	768	DROME HILL
TRC187036	340	24.1	110.5	<0.002	0.03	1.31	14.5	1	2.8	187.5	0.74	0.1	10.8	0.439	0.68	1.4	104	2.7	17.4	104	73.1	7037050	341250	739	DROME HILL
TRC187037	440	15.8	111.5	<0.002	0.02	1.07	13.6	1	2.7	202	0.7	0.07	9.91	0.459	0.66	1.4	102	2.2	15	84	74.2	7037050	341300	736	DROME HILL
TRC187038	570	14.8	105	<0.002	0.02	0.96	13.4	1	2.5	204	0.61	0.07	10.85	0.399	0.6	1.5	93	2.5	17.4	88	66.9	7037000	341300	706	DROME HILL
TRC187039	740	16.6	103	<0.002	0.1	1	12.3	1	2.1	193.5	0.74	0.09	10.65	0.43	0.59	1.4	91	2.2	14.4	79	77.8	7037000	341250	705	DROME HILL
TRC187040	270	9.5	133.5	<0.002	0.14	0.62	26.3	3	7.6	177.5	0.43	<0.05	8.12	0.665	0.9	1.2	184	1.8	15.8	80	51.5	7036950	341300	685	DROME HILL
TRC187042	1010	23	116	<0.002	0.16	1.77	13.3	3	3.5	192.5	0.67	0.92	13.2	0.372	0.65	2	102	5.6	20.2	82	62.5	7036950	341250	686	DROME HILL
TRC187043	340	8.8	88.9	<0.002	0.01	0.72	9.4	<1	177	0.5	0.78	0.08	8.25	0.278	0.43	1.3	61	4.5	13.8	72	60.1	7036950	341250	689	DROME HILL
TRC187044	850	9.9	95.3	<0.002	0.08	0.95	20.3	3	2.7	207	0.55	0.05	8.18	0.248	0.43	1.3	49	3.3	18.8	104	40.7	7036750	341250	580	DROME HILL
TRC187045	1510	18.6	93.8	<0.002	0.05	1.09	12.5	1	1.9	196	0.57	0.1	9.32	0.353	0.5	1.2	91	8.6	18.8	179	43.9	7036700	341300	593	DROME HILL
TRC187046	520	17.2	132	<0.002	0.04	1.53	16.3	2	4.2	176	0.73	0.1	13.1	0.437	0.71	1.9	120	4.4	21.4	72	63	7036950	341150	657	DROME HILL
TRC187047	700	18.2	123.5	<0.002	0.03	0.96	13.8	1	2.9	155	0.73	0.06	11.75	0.424	0.69	1.7	101	2.3	17.1	81	70.9	7036950	341350	674	DROME HILL
TRC187048	4150	8.2	68.5	<0.002	0.15	0.7	7.9	1	1.7	323	0.39	0.06	5.61	0.212	0.36	0.8	56	1.5	10.6	100	39.7	7036950	341400	673	DROME HILL
TRC187049	580	15.1	118.5	<0.002	0.01	1.57	14.9	1	2.7	175.5	0.74	0.12	12.5	0.417	0.63	1.7	99	2.5	22.1	88	80.5	7036950	341450	706	DROME HILL
TRC187050	560	12.8	135	<0.002	0.01	1.22	16.1	1	2.9	149	0.87	0.11	13.4	0.461	0.61	1.7	127	4.4	17.9	97	79.6	7036950	341500	727	DROME HILL
TRC187052	580	15.8	139.5	<0.002	0.03	0.95	15.7	1	3	183	0.91	0.19	14.45	0.464	0.66	1.9	125	5.1	17.9	103	86.3	7036950	341550	708	DROME HILL
TRC187053	530	12.8	166.5	<0.002	0.02	1.03	16.1	1	3.8	137	0.97	0.27	17.35	0.368	0.47	2.1	103	16.7	19.6	103	70.3	7036950	341550	710	DROME HILL
TRC187054	900	14.9	117.5	<0.002	0.03	1.05	14	1	4	161.5	0.72	0.1	11.55	0.397	0.58	1.7	100	2.8	17.9	253	71.9	7036900	341600	698	DROME HILL
TRC187055	1000	16	124	<0.002	0.03	0.89	16.8	1	3.3	182	0.82	0.09	14.3	0.454	0.66	1.7	112	2.7	21.3	230	79.5	7036900	341550	666	DROME HILL
TRC187056	880	19.4	100	<0.002	0																				

Tesoro Gold

Tesoro Gold

ASX ANNOUNCEMENT
19 MARCH 2026



Method Analyte	ME-M561 P ppm 10	ME-M561 Pb ppm 0.5	ME-M561 Rb ppm 0.1	ME-M561 Re ppm 0.002	ME-M561 S % 0.01	ME-M561 Sb ppm 0.05	ME-M561 Sc ppm 0.1	ME-M561 Se ppm 1	ME-M561 Sn ppm 0.2	ME-M561 Sr ppm 0.5	ME-M561 Ta ppm 0.05	ME-M561 Te ppm 0.05	ME-M561 Th ppm 0.01	ME-M561 Ti % 0.005	ME-M561 Tl ppm 0.02	ME-M561 U ppm 0.1	ME-M561 V ppm 1	ME-M561 W ppm 0.1	ME-M561 Y ppm 0.1	ME-M561 Zn ppm 2	ME-M561 Zr ppm 0.5	NORTHING	EASTING	ELEVATION	TARGET
Sample ID																									
TRC187287	750	13.9	204	<0.002	0.01	0.71	8	<1	8.4	108.5	1.02	<0.05	10.6	0.292	0.84	1.4	45	1.6	20.3	87	23.6	7028950	342900	732	SIERRA PEÑA BLANCA
TRC187288	700	10.9	233	<0.002	0.01	0.65	9.8	<1	8	63.7	1.22	<0.05	12.95	0.33	0.89	1.6	55	2	26.5	27	24.6	7028750	342750	730	SIERRA PEÑA BLANCA
TRC187289	750	18.5	209	<0.002	0.01	0.59	9.6	<1	7.3	102.5	1.36	<0.05	13.9	0.353	0.89	1.5	51	1.3	20.7	64	25.4	7028750	342800	729	SIERRA PEÑA BLANCA
TRC187290	770	16.3	217	<0.002	0.01	0.58	9.3	<1	7.2	105	1.3	<0.05	13.1	0.338	0.94	1.7	50	1.3	24	74	25.3	7028800	342800	728	SIERRA PEÑA BLANCA
TRC187292	720	14.5	207	<0.002	0.01	0.49	8.9	<1	6.5	115.5	1.3	<0.05	11.9	0.351	0.92	1.3	51	1.4	19.6	81	32	7028850	342650	726	SIERRA PEÑA BLANCA
TRC187293	520	18.2	213	<0.002	0.01	0.63	10.4	<1	7.4	103	1.53	<0.05	11.35	0.369	0.98	2	63	2.6	18.8	99	43.7	7028900	342850	725	SIERRA PEÑA BLANCA
TRC187294	1110	20.6	227	<0.002	0.01	0.65	11.2	1	7.9	112.5	1.7	<0.05	14.7	0.41	1.08	2	59	1.7	22.9	94	37.9	7028950	342900	724	SIERRA PEÑA BLANCA
TRC187295	1410	20.1	210	<0.002	0.01	0.72	10.6	1	7.2	120	1.56	0.05	12.95	0.413	0.99	1.7	60	1.8	20.7	98	38	7028750	342750	723	SIERRA PEÑA BLANCA
TRC187296	860	20.3	252	<0.002	0.01	0.52	11	1	8.4	98.9	1.74	<0.05	15	0.427	1.27	2	61	1.3	18.4	72	31.3	7028750	342800	721	SIERRA PEÑA BLANCA
TRC187297	1170	18.2	203	<0.002	0.01	0.65	12.6	<1	7.9	99.2	1.42	<0.05	14.85	0.388	0.89	1.9	57	1.4	35.9	94	31.7	7028800	342800	720	SIERRA PEÑA BLANCA
TRC187298	1180	26	195.5	<0.002	0.01	0.55	12	1	6.9	125.5	1.52	<0.05	14.7	0.421	0.95	1.6	66	1.3	23.9	104	41.8	7028850	342850	719	SIERRA PEÑA BLANCA
TRC187299	530	17.9	228	<0.002	0.01	0.48	9.4	<1	8.3	88.4	1.56	<0.05	13.8	0.346	1.11	1.3	52	1.7	15.7	69	27.2	7028900	342850	717	SIERRA PEÑA BLANCA
TRC187300	820	17.7	202	<0.002	0.01	0.53	9.2	<1	6.8	110	1.4	<0.05	13.55	0.375	0.93	1.5	53	1.2	21.6	72	29.3	7028950	342900	716	SIERRA PEÑA BLANCA
TRC187302	660	17.2	202	<0.002	0.01	0.55	9.3	<1	6.5	97.6	1.6	<0.05	13.2	0.371	0.91	1.7	51	1.3	21.3	64	31.7	7028750	342750	715	SIERRA PEÑA BLANCA
TRC187303	430	13.6	124.5	<0.002	<0.01	1.49	12.5	1	3.5	77.8	0.87	<0.05	13.85	0.368	0.57	2.1	86	2.7	16.6	58	70.5	7051041	339336	720	LA BREA
TRC187304	300	14.6	105.5	<0.002	<0.01	1.87	11.5	1	3	102	0.74	0.07	11.95	0.351	0.55	1.6	76	2.8	15	55	71.2	7051041	339361	714	LA BREA
TRC187305	490	18.7	138.5	0.002	0.01	0.89	17.3	2	3.2	108.5	0.87	0.06	15.25	0.405	0.76	2	115	2.8	20	69	92.5	7051041	339386	705	LA BREA
TRC187306	710	18.8	146	<0.002	<0.01	0.89	14.4	1	3.5	107	0.87	<0.05	13.5	0.394	0.67	2	95	2.9	20.3	107	79.4	7051066	339386	704	LA BREA
TRC187307	750	13.8	127.5	<0.002	<0.01	3.25	13.2	1	3.9	97.5	0.69	0.07	12.5	0.327	0.57	1.8	85	4.5	21.1	82	78.2	7051066	339361	716	LA BREA
TRC187308	690	14.7	125	<0.002	<0.01	3.17	13.3	1	3.7	86	0.79	0.05	12.6	0.339	0.54	1.9	86	2.7	18.6	76	67.2	7051066	339336	726	LA BREA
TRC187309	330	10.2	108	<0.002	0.01	2.22	16.6	1	3.2	66.4	0.55	0.05	10.55	0.302	0.48	2	126	3.5	21.2	65	78.1	7051066	339311	734	LA BREA
TRC187310	650	14.8	128.5	<0.002	<0.01	1.57	12.6	1	4.5	93.8	0.81	0.06	12.55	0.341	0.59	2.2	84	2.8	16	71	71.6	7051091	339311	732	LA BREA
TRC187312	540	11.9	87.1	0.002	0.02	4.54	21.1	2	3	91.2	0.47	0.05	7.75	0.316	0.44	1.5	129	5.9	18.2	66	57.9	7051091	339336	724	LA BREA
TRC187313	390	14.8	112.5	<0.002	0.01	1.91	13.2	1	3.5	98.6	0.71	<0.05	11.9	0.36	0.57	1.9	86	2.7	17.8	69	68.3	7051041	339311	725	LA BREA
TRC187314	380	15.2	118	<0.002	<0.01	2.35	14.2	1	3	75.8	0.64	<0.05	9.63	0.334	0.5	1.5	92	2	19	137	57.8	7051066	339286	724	LA BREA
TRC187315	510	6.3	75.3	<0.002	0.05	0.87	24.9	2	3.1	179	0.89	<0.05	3.28	1.04	0.51	0.5	195	1.1	20.2	111	41.5	7051191	339211	740	LA BREA
TRC187316	800	4.7	55.4	<0.002	0.08	0.84	25.9	2	2.1	397	0.84	0.05	2.18	1.155	0.35	0.4	209	0.7	20.8	106	30.6	7051191	339186	737	LA BREA
TRC187317	450	17.4	192.5	<0.002	<0.01	0.56	17	1	4	83.7	1.14	0.07	16.25	0.489	0.82	2.5	131	2.2	22.2	99	94.9	7051216	339236	740	LA BREA
TRC187318	590	9.5	89.7	<0.002	0.01	1.67	24.2	1	2.9	386	0.8	0.07	5.2	0.958	0.51	0.8	195	2	21.3	112	46.3	7051166	339186	718	LA BREA
TRC187319	430	10.1	50.4	<0.002	<0.01	1.51	23.8	<1	3.2	256	0.85	0.07	3.02	1.1	0.39	0.5	210	1.1	18.4	125	36.4	7051166	339211	723	LA BREA
TRC187320	760	6.9	99.6	<0.002	0.01	3.87	12.6	1	3.5	86.1	0.51	0.08	11.4	0.303	0.46	1.7	107	4.6	12.2	41	90.4	7051066	339236	698	LA BREA
TRC187322	770	12.9	103.5	<0.002	0.02	1.92	16.9	1	3.5	105	0.77	<0.05	11.3	0.55	0.5	1.4	146	3	16.9	101	64	7051091	339236	709	LA BREA
TRC187323	730	9.7	75.7	<0.002	0.01	1.51	23.9	1	2.4	197.5	0.77	0.05	4.91	0.91	0.45	0.7	193	1	20.2	136	48.1	7051141	339236	723	LA BREA
TRC187324	590	8.2	64.6	<0.002	0.01	0.87	20.8	1	2.5	213	0.94	0.05	4.39	0.951	0.41	0.7	177	1.3	18.2	114	41.9	7051141	339211	723	LA BREA
TRC187325	780	12.2	96.7	<0.002	0.04	0.58	10.8	1	2.3	155	0.73	<0.05	12.1	0.347	0.53	1.8	86	2	13.6	57	42	7050991	339236	690	LA BREA
TRC187326	540	7	61.6	<0.002	0.01	0.53	10	1	1.6	187.5	0.5	<0.05	6.83	0.346	0.35	0.9	76	1.9	14.6	66	29	7050966	339236	691	LA BREA
TRC187327	440	10	85.6	<0.002	0.01	0.72	11.1	1	2.3	166.5	0.68	<0.05	9.85	0.379	0.46	1.3	82	2	15.4	64	44.1	7050966	339261	701	LA BREA
TRC187328	480	11.8	104	<0.002	0.01	1.07	12.1	1	2.8	128	0.78	<0.05	12.85	0.362	0.53	1.7	108	3.3	13.5	63	56.7	7050966	339286	714	LA BREA
TRC187329	960	5.2	99.8	<0.002	0.01	2.71	12.4	1	4.2	62.7	0.51	0.05	9.15	0.333	0.47	1.5	107	5.5	12.4	41	40	7050991	339261	712	LA BREA
TRC187330	940	5.1	100	<0.002	0.01	2.76	12	1	4.1	60.4	0.52	0.05	8.78	0.338	0.47	1.5	106	5.5	12.4	40	42	7051016	339261	708	LA BREA
TRC187332	620	15.2	104	<0.002	0.01	0.58	11.6	1	3.1	123	0.82	<0.05	15.2	0.372	0.52	1.9	88	2.7	15.4	64	50.3	7051041	339186	671	LA BREA
TRC187333	1100	13.9	98.2	<0.002	0.03	0.46	11.2	1	3.2	115.5	0.88	0.05	12.85	0.369	0.52	2	94	2.3	12.8	76	55.6	7051066	339186	680	LA BREA
TRC187334	860	8.5	78.1	<0.002	0.02	0.57	13.2	1	1.9	154	0.58	<0.05	8.51	0.374	0.52	1.1	112	10.3	10.5	73	36.1	7051066	339161	675	LA BREA
TRC187335	670	6.4	73.5	<0.002	0.01	0.33	9.5	<1	1.7	171	0.53	0.13	8.16	0.314	0.36	0.9	72	42.7	16	66	28.2	7051066	339136	660	LA BREA
TRC187336	370	6.2	42.6	<0.002	0.02	0.31	8.7	1	1.8	190.5	0.39	<0.05	4.61	0.291	0.34	0.5	62	4.4	12.6	79	25.4	7051066	339111	652	LA BREA
TRC187337	350	10.7	76.5	<0.002	0.01	0.61	13.6	1	2.4	193.5	0.6	<0.05	7.89	0.413	0.46	1	99	2.6	17.8	78	43.4	7051091	339111	665	LA BREA
TRC187338	430	11.7	59.9	<0.002	0.02	0.39	11	1	3.7	206	0.47	0.1	6.07	0.341	0.4	0.8	82	25.7	17	185	28.6	7051091	339136	666	LA BREA
TRC187339	380	11.9	107.5	<0.002	0.02	0.81	13	1	2.7	150	0.63	<0.05	10.9	0.363	0.57	1.4	102	2.4	17.6	57	53	7051141	339136	701	LA BREA
TRC187340	330	10.3	107.5	<0.002	0.01	0.84	13.4	1	2.9	153.5	0.63	0.06	11.05	0.413	0.55	1.3									

Method Analyte	ME-MS61 P ppm 10	ME-MS61 Pb ppm 0.5	ME-MS61 Rb ppm 0.1	ME-MS61 Re ppm 0.002	ME-MS61 S % 0.01	ME-MS61 Sb ppm 0.05	ME-MS61 Sc ppm 0.1	ME-MS61 Se ppm 1	ME-MS61 Sn ppm 0.2	ME-MS61 Sr ppm 0.2	ME-MS61 Ta ppm 0.05	ME-MS61 Te ppm 0.05	ME-MS61 Th ppm 0.01	ME-MS61 Ti % 0.005	ME-MS61 Ti ppm 0.02	ME-MS61 U ppm 0.1	ME-MS61 V ppm 1	ME-MS61 W ppm 0.1	ME-MS61 Y ppm 0.1	ME-MS61 Zn ppm 2	ME-MS61 Zr ppm 0.5	NORTHING	EASTING	ELEVATION	TARGET
Sample ID	10	0.5	0.1	0.002	0.01	0.05	0.1	1	0.2	0.2	0.05	0.05	0.01	0.005	0.02	0.1	1	0.1	0.1	2	0.5				
TRC187383	370	9.2	106.5	<0.002	0.01	1.29	12.7	<1	2.7	71.2	0.6	0.06	11.4	0.318	0.46	1.4	102	4.8	14.6	58	46.2	7050866	339336	690	LA BREA
TRC187384	370	13.7	142	<0.002	0.01	1.38	13	<1	3	98.5	0.87	<0.05	15.4	0.372	0.64	2	91	2.8	15.9	63	60.7	7050866	339361	694	LA BREA
TRC187385	620	16.8	94.7	<0.002	0.03	1.93	17.3	1	2.4	114.5	0.56	<0.05	10.55	0.416	0.55	1.6	123	1.9	21.2	85	51.2	7050866	339386	699	LA BREA
TRC187386	620	11.6	148	<0.002	0.01	1.1	15	1	3.9	85.9	0.95	0.05	14.75	0.431	0.59	2.2	127	2.6	18.3	74	89.6	7050941	339461	671	LA BREA
TRC187387	930	11.3	139.5	<0.002	0.01	2.36	14	1	3.6	79.2	0.72	0.05	14.2	0.321	0.57	2.2	124	4	16.8	58	73.5	7050941	339436	673	LA BREA
TRC187388	610	13.3	144	<0.002	0.02	2.56	14.1	2	4.5	102.5	0.79	0.09	14.5	0.369	0.72	2.3	114	8.4	17.4	48	79.8	7050941	339411	677	LA BREA
TRC187389	480	11	103.5	<0.002	0.01	0.76	10.6	1	2.4	81.9	0.73	<0.05	12	0.322	0.45	1.5	90	3.2	13	61	54.4	7050941	339386	680	LA BREA
TRC187390	470	12.1	130.5	<0.002	0.01	2.59	12.2	1	3.2	80.3	0.69	0.07	12.05	0.305	0.6	1.7	119	4.4	14.2	49	68.4	7050916	339436	689	LA BREA
TRC187392	1160	10.8	105	<0.002	0.01	1.7	13.6	1	3	107	0.72	0.07	14.55	0.28	0.48	1.9	131	4	19.9	42	63.5	7050891	339411	706	LA BREA
TRC187393	600	14.8	99.7	<0.002	0.01	4.13	13.5	1	1.9	134.5	0.64	0.07	11.4	0.299	0.52	1.4	95	2.4	16.4	72	48	7050891	339386	700	LA BREA
TRC187394	710	12.3	107	<0.002	0.01	0.96	10.8	1	2.8	87.8	0.64	<0.05	11.5	0.279	0.54	1.6	84	2.6	12.1	56	49.3	7050916	339361	695	LA BREA
TRC187395	580	9.9	118	<0.002	0.01	2.96	12.2	1	4.2	70.8	0.58	<0.05	12.5	0.272	0.54	1.9	110	4.1	13.4	46	57.2	7050966	339311	707	LA BREA
TRC187396	720	6.3	80.2	<0.002	0.02	5.93	15.4	1	3.6	63.6	0.56	0.08	8.81	0.416	0.42	1.6	124	7.6	15.3	50	48.4	7050991	339311	712	LA BREA
TRC187397	250	11	80.5	<0.002	0.01	1.49	9.5	<1	2.3	94.4	0.66	0.08	9.62	0.296	0.42	1.4	60	2.3	11.8	42	54.9	7051016	339336	709	LA BREA
TRC187398	520	8.6	117	<0.002	0.02	3.73	14.8	2	3.4	53.2	0.5	0.06	10.8	0.236	0.57	1.7	94	3.6	15.9	28	53.3	7050991	339336	699	LA BREA
TRC187399	470	16.4	109.5	<0.002	0.01	2.68	13.2	1	3.7	74.6	0.6	0.1	12	0.266	0.52	1.8	107	4.4	13.3	182	48.8	7050966	339336	703	LA BREA
TRC187400	1050	67.3	90	<0.002	0.02	1.96	11.4	1	2.9	109.5	0.63	0.65	10.2	0.274	0.43	1.5	86	11.2	13.4	153	40.6	7050941	339336	701	LA BREA
TRC187402	480	14.2	112	<0.002	0.01	1.06	11.3	1	2.2	94.5	0.74	0.07	12.5	0.298	0.55	1.7	82	2.8	14.2	60	52.8	7050941	339361	694	LA BREA
TRC187403	760	10.9	154.5	<0.002	0.01	1.14	16.8	1	3.3	98.3	0.84	0.1	15.25	0.355	0.7	2	118	3.6	19	101	92.9	7050991	339436	653	LA BREA
TRC187404	760	10.7	142.5	<0.002	0.01	2.2	13	1	4.2	78.7	0.74	0.06	13.75	0.315	0.67	2.2	93	4.3	16.8	50	75.6	7050966	339436	658	LA BREA
TRC187405	710	8.9	109.5	<0.002	0.02	2.16	12.4	1	3.2	73.1	0.63	0.05	10.8	0.276	0.54	1.9	88	6.9	14	42	49.7	7050966	339411	660	LA BREA
TRC187406	440	11.8	128.5	<0.002	0.01	0.94	14.1	1	3.3	75.2	0.8	0.05	13.55	0.337	0.58	2	95	3.5	17.6	57	81	7050991	339411	667	LA BREA
TRC187407	640	10.9	107.5	<0.002	0.01	1.08	11.8	1	2.6	109.5	0.67	0.05	10.45	0.287	0.49	1.5	85	2.8	12.5	53	74.8	7050966	339386	667	LA BREA
TRC187408	300	10.4	90	<0.002	0.01	2.02	9.8	1	3.2	74.8	0.66	0.07	9.96	0.293	0.44	1.5	65	4.1	11.9	43	59.5	7050991	339386	675	LA BREA
TRC187409	410	20.9	134	<0.002	0.01	0.96	16	1	3.1	107.5	0.81	0.09	13.35	0.373	0.7	2	104	3.1	21.1	76	81.6	7051016	339411	682	LA BREA
TRC187410	400	15.1	121.5	<0.002	0.02	1.32	14	1	2.9	96.9	0.81	0.09	12.95	0.372	0.62	1.8	94	3.7	17.7	64	86.8	7051016	339386	688	LA BREA
TRC187412	360	10.3	90.4	<0.002	0.02	2.18	10.1	1	3.2	91	0.63	0.07	10.15	0.281	0.46	1.5	64	3.1	12.2	41	65.1	7051016	339361	695	LA BREA